1 Cover and general notes

Construction drawings for Linda Bushel's rear deck at the above-ground pool. Eleven helical piles, sixteen joist lines, and eleven stair stringers. Prepared with the estimate of 27 Oct 2026 and for the permit application. This set is not a town approval and not an engineering seal.

Client	Linda Bushel
Project	Freestanding pressure-treated deck and stairs at an above-ground pool
Location	12 D'Arcy's Way, Kemptville, ON K0G 1J0
Pool	21 ft diameter, about 50 in high. Confirmed on site.
Upper deck	18 ft wide. 5 ft clear at the centre. The inner edge follows the pool curve.
Pool edge	Follows the pool curve. No attachment to the pool.
Stairs	10 ft wide, centred. About 38 in between the two decks. Five risers of about 7.6 in.
Lower deck	10 ft wide by 3 ft deep, about 12 in above grade.
Foundation	11 galvanized steel helical piles with brackets, installed by a specialist foundation contractor. No concrete.
Framing	Pressure-treated double 2×10 beams, 2×8 joists at 16 in on centre, 6×6 posts, 2×12 stair stringers.
Decking	Trex Select composite, Island Mist, on both decks and the stair treads and risers. Trex Island Mist fascia.
Railing and gate	Vista 42 in aluminium railing, textured black, standard pickets. 48 in wide gate centred on the lower deck.

Layout

Left and right are from the pool centre, standing at the stairs and looking at the pool. The front edge of the upper deck is 15 ft 6 in from the pool centre. Each side is 9 ft from the centre. The main beam is 6 ft long and centred, 13 ft from the pool centre toward the stairs. The wing beams run from the main beam to piles 9 ft left and 9 ft right, 8 ft 6 in out from the pool centre. Seven piles are under the upper deck and four are under the lower deck. All sizes are confirmed on site before construction.


CODE AND PERMIT BASIS

Prepared in accordance with the 2024 Ontario Building Code and applicable Municipality of North Grenville zoning, pool-enclosure and permit requirements. Final construction is subject to municipal review and approval, field verification, and all conditions of the issued permit. Pile locations and capacity are confirmed by the foundation contractor, with an engineer's report if the town requires it.

Sheet index

1 Cover and general notes
2 Pile and foundation plan
3 Post, beam, joist, and header framing plan
4 Decking, stairs, railing, and gate plan
5 Front and side elevations
6 Stair riser, tread, and stringer
7 Typical pile, post, beam, joist, and connectors
8 Site verification and permit notes

2 Pile and foundation plan

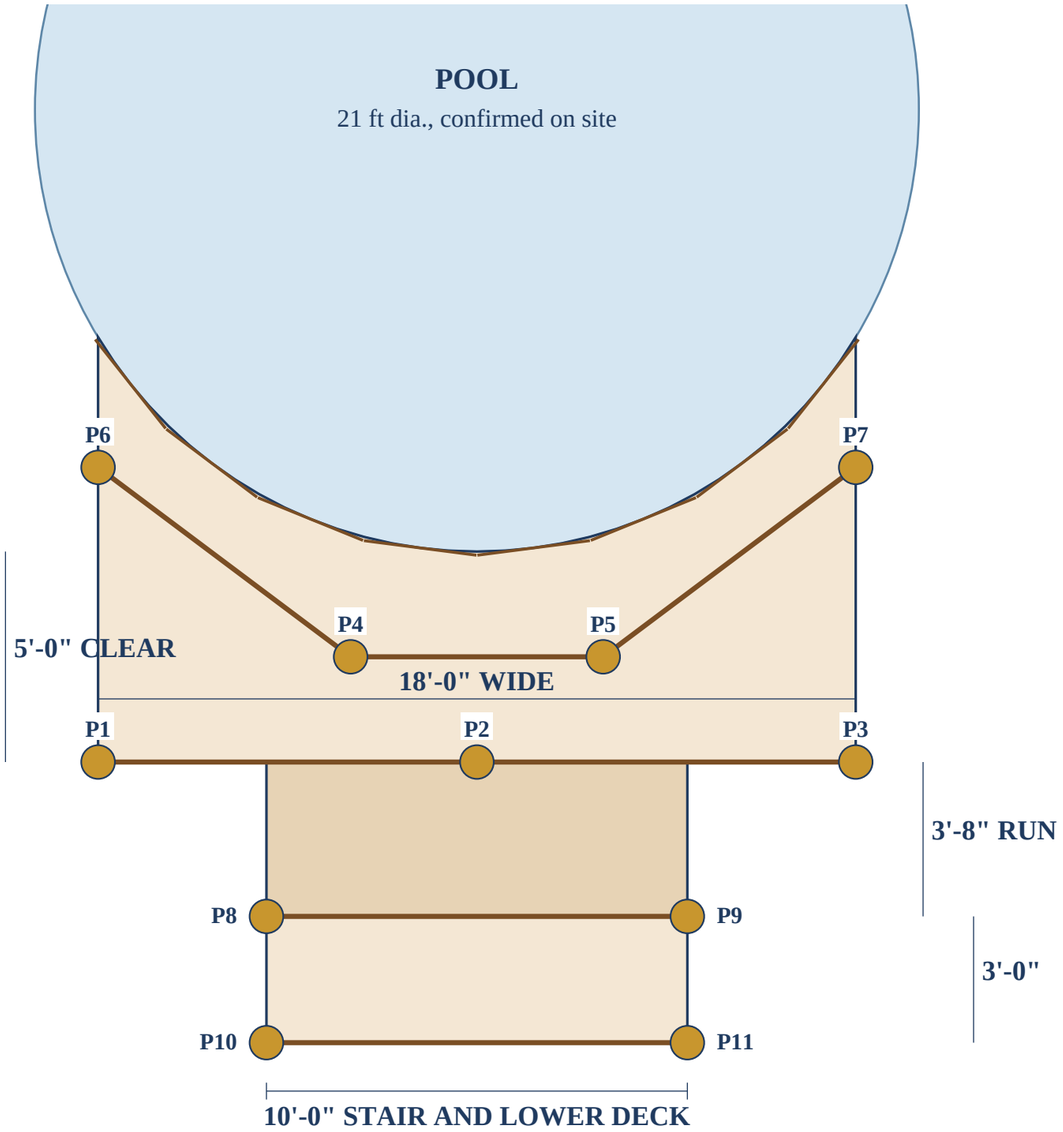

Not a construction scale. Read the written dimensions. The pool is at the top of the sheet.

Notes

P1 to P7 are under the upper deck. P8 to P11 are under the lower deck. Eleven piles.

Each pile is a galvanized steel helical pile with an adjustable bracket, installed to the required resistance by the foundation contractor. No concrete.

P4 and P5 carry the main beam, 2'-11 1/4" clear of the pool wall. P6 and P7 are 1'-10 9/16" outside the wall, measured from the pool centre.

No pile is inside the pool. Final pile positions, depth and bearing are set on site by the foundation contractor.

Front beam piles are 9 ft apart. Each side of the lower deck is one 10 ft span between corner piles. Beam sizes are confirmed against the span tables at permit.

Left and right are from the pool centre, standing at the stairs and looking at the pool. Distances marked out are from the pool centre toward the stairs.


The stairs are four treads of about 11 in, run 3'-8". The lower deck then runs from 19'-2" to 22'-2" out from the pool centre.

Pile locations

Left and right: standing at the stairs, looking at the pool.
Out: from the pool centre toward the stairs.

P1	9'-0" left	15'-6" out	P7	9'-0" right	8'-6" out
P2	on centre	15'-6" out	P8	5'-0" left	19'-2" out
P3	9'-0" right	15'-6" out	P9	5'-0" right	19'-2" out
P4	3'-0" left	13'-0" out	P10	5'-0" left	22'-2" out
P5	3'-0" right	13'-0" out	P11	5'-0" right	22'-2" out
P6	9'-0" left	8'-6" out			

3 Post, beam, joist, and header framing plan

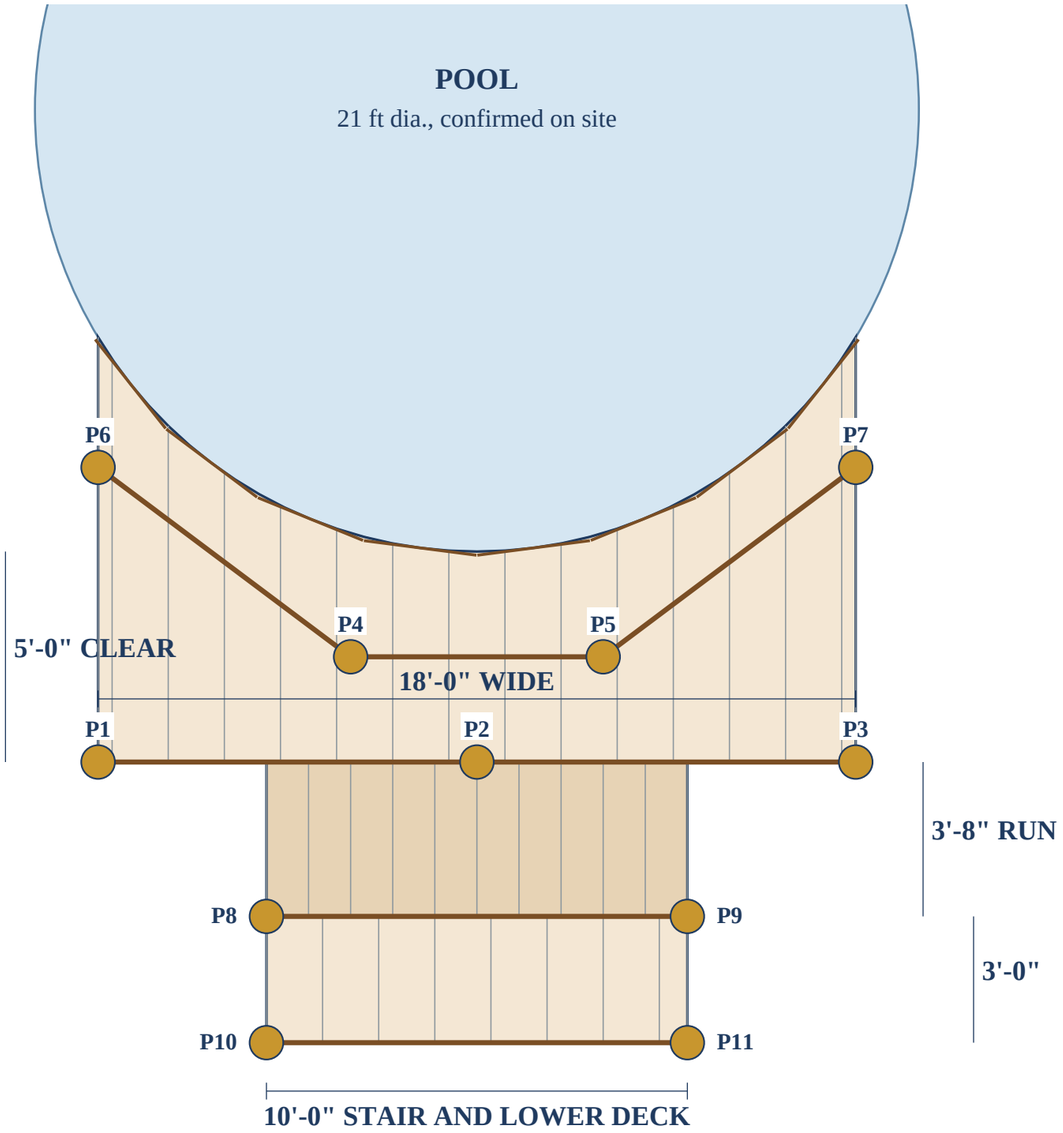

Not a construction scale. Read the written dimensions. The pool is at the top of the sheet.

Notes

Grey lines are 2×8 joists and 2×12 stair stringers. Brown lines are the double 2×10 beams and the curved 2×8 header.

Joists run square to the 18 ft front, at 16 in on centre maximum. They sit on both outside edges and at 8, 24, 40, 56, 72, 88, and 104 in each side of centre. Sixteen joists.

The main beam is a double 2×10, 6 ft long and centred on P4 and P5, 13 ft from the pool centre toward the stairs. Each wing beam is a double 2×10 from P4 to P6 and from P5 to P7.

The front beam is a double 2×10 along the 18 ft front edge on P1, P2 and P3, with the ply joints staggered over a pile.


The header at the pool is 8 straight 2×8 pieces, each about 2.70 ft, following the pool curve. No piece touches or goes into the pool. The header is cut to the pool on site.

Blocking between the joists at the front beam, the main beam and the wings.

Lower-deck joists are 2×8 at 16 in on centre across the 10 ft width, hung flush between the two lower double 2×10 beams on joist hangers, so the deck sits about 12 in above grade.

Eleven 2×12 stair stringers at 12 in on centre, hung from the front beam with concealed stringer hangers.

4 Decking, stairs, railing, and gate plan

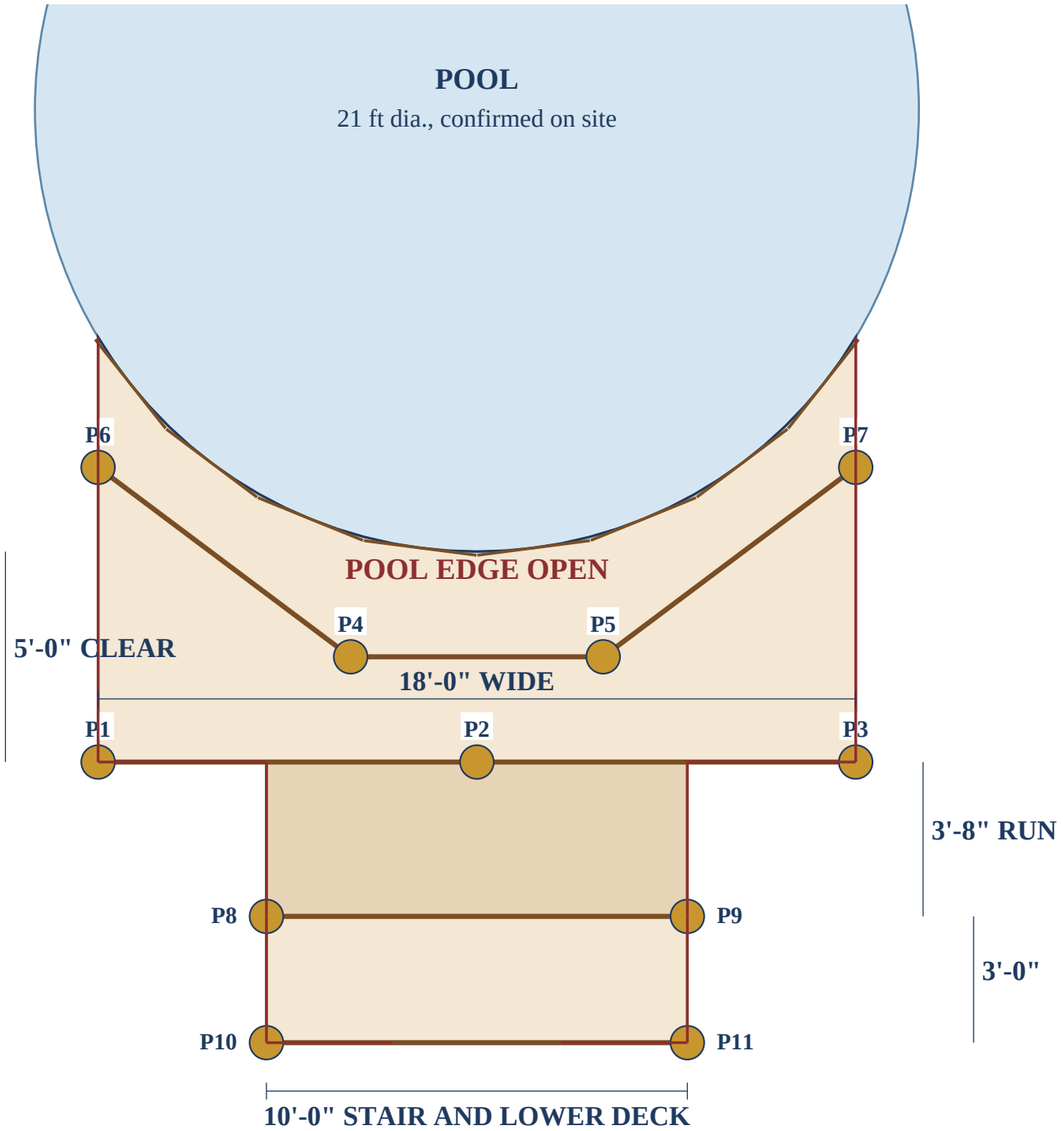

Notes

Trex Select composite decking, Island Mist, runs parallel to the 18 ft front edge, fastened with Trex hidden deck fasteners.

The full-width band covers the 5 ft from the pool to the front edge. Beside the curve, each row is cut to follow the pool wall.

Stair treads and risers are Trex Select, Island Mist. Trex Island Mist fascia covers the exposed deck and stair edges, with colour-matched screws.

Red lines are the railing runs: Vista 42 in aluminium railing, textured black, standard pickets, on posts with base plates over solid blocking.

Railing on the upper deck sides and front, both sides of the stairs, and the lower deck. The curved pool edge is open, as the pool wall forms that side.

The gate is a matching Vista gate, 42 in high and 48 in wide, centred on the 10 ft lower front.


No skirting under either deck.

Not a construction scale. Read the written dimensions. The pool is at the top of the sheet.

5 Front and side elevations


Same scale on both views, about 7/16 in = 1 ft. Railing is Vista 42 in aluminium, textured black.
Helical piles are drawn short; the foundation contractor sets the depth. No concrete. No attachment to the pool.

Side — along the 18 ft edge, stair to the right

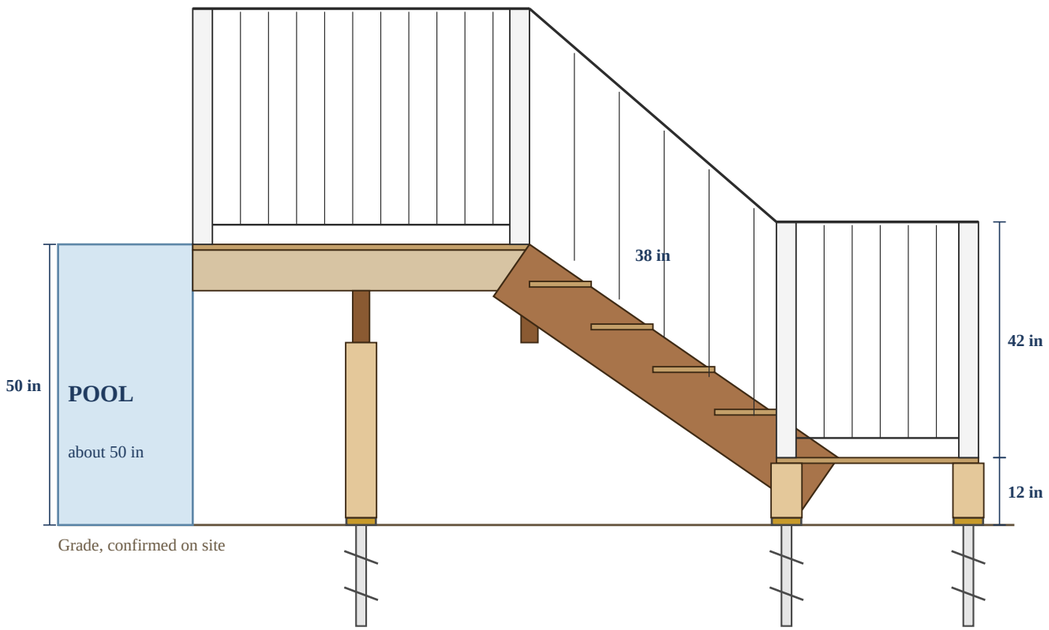

6×6 post on a helical pile. Joist on a double 2×10.

Front — standing at the lower entrance

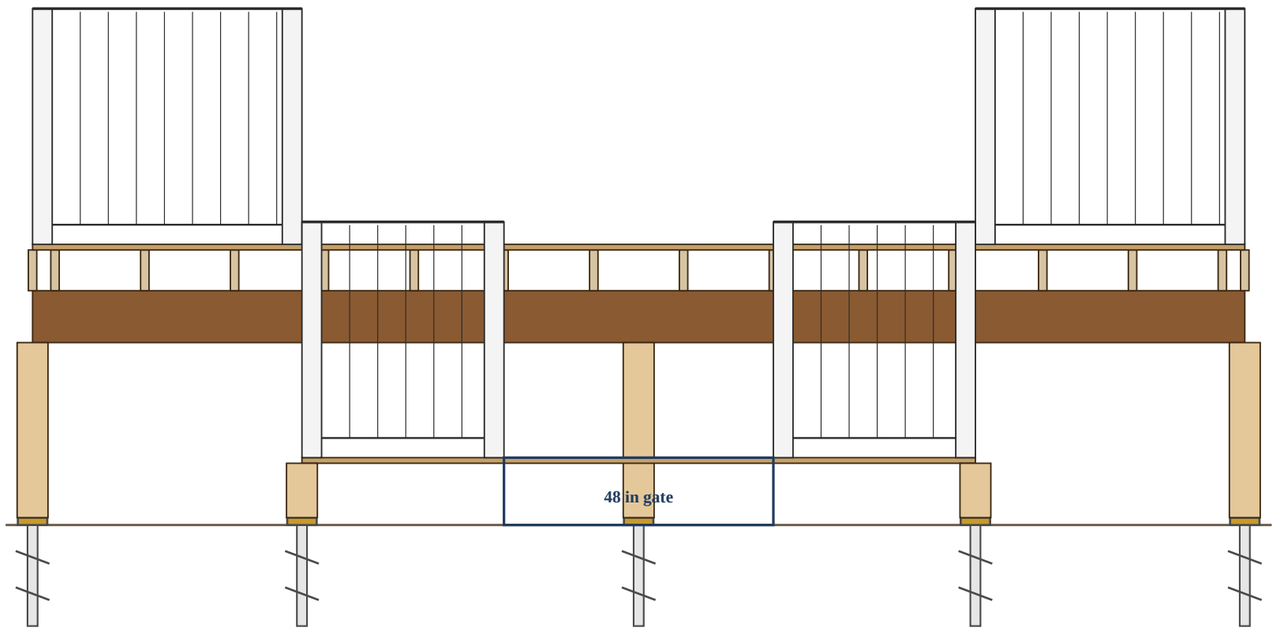


Lower deck framed flush, about 12 in above grade.

Front beam on three piles. Lower deck on its four corner piles; the rear piles are on the plan.

Upper deck: decking on 2×8 joists on double 2×10 beams, about 50 in above grade. Lower deck: joists hung flush between the double 2×10 beams on joist hangers, about 12 in above grade.

6 Stair riser, tread, and stringer

Five risers of about 7.6 in and treads of about 11 in, over about 38 in. Four treads, because the upper deck is the top landing. The rise and run are set on site after both deck surfaces are measured, keeping all risers equal.

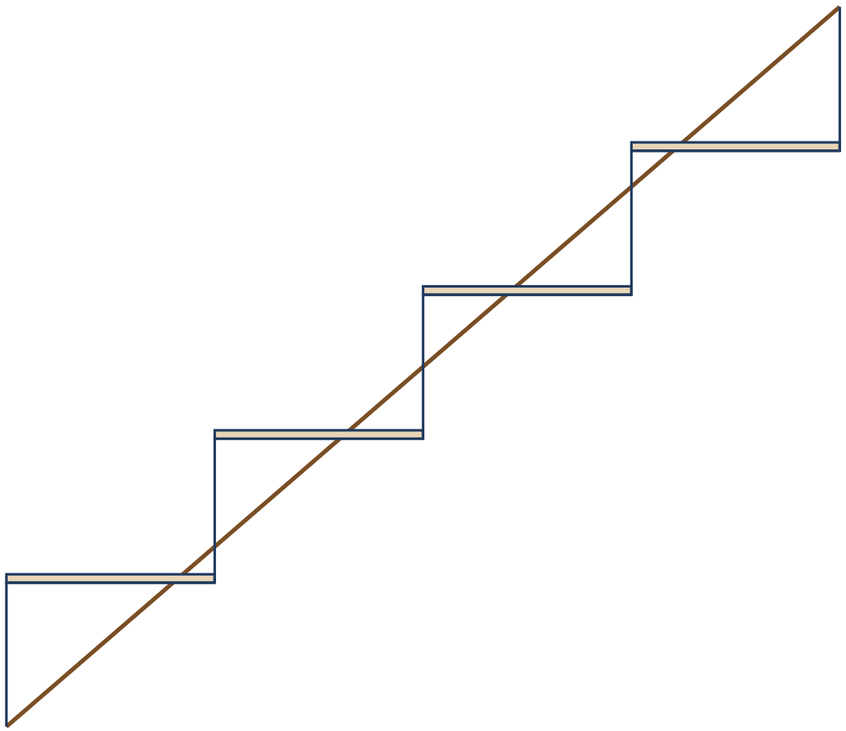


Total run 3'-8" **Total rise 3'-2"**

Each tread is two Trex Select boards, 10 ft long, with a Trex riser board. Nosing about 1/2 to 3/4 in past the riser.

Stringers

Eleven pressure-treated 2×12 stringers across the 10 ft width, at 12 in on centre, the maximum spacing for Trex Select stair treads. Each stringer hangs from the upper front beam on a concealed stringer hanger and bears on the lower deck frame. No centre handrail; Vista railing on both sides.

7 Typical helical pile, bracket, post, beam, and joist

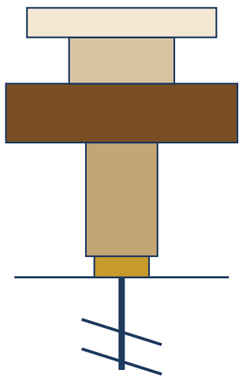

Trex Select decking, Island Mist

2×8 pressure-treated joist

Double 2×10 pressure-treated beam

6×6 pressure-treated post, cut on site

Adjustable pile bracket

Galvanized steel helical pile

Posts are cut on site to the pile bracket height. No concrete.

Connections

11 helical piles, each with an adjustable bracket, installed by the foundation contractor.
Post-to-beam ties at every post.
Skewed hangers where the upper joists meet the curved header.
Joists sit on top of the straight beams, fastened with structural screws at each bearing.
Concealed stringer hangers at the top of the eleven stair stringers.
Double 2×10 beams through-bolted with carriage bolts, nuts and washers.
Solid blocking under each Vista railing post base.
Trex hidden deck fasteners; colour-matched screws for the fascia.
All hardware galvanized or otherwise rated for pressure-treated lumber.

8 Site verification and permit notes

1. Pool diameter and height are confirmed on site before construction. The 21 ft and 50 in figures are approximate.
2. Finished grades, the installed pool elevation, setbacks and property lines are confirmed on site.
3. Pile positions, depth and bearing are set by the foundation contractor. The engineer's report and compliance letter are provided if the town requires them.
4. The deck is freestanding and is not attached to the pool.
5. Stair rise and run are set after both deck surfaces are measured, keeping all risers equal.
6. Railing height and the pool-enclosure requirements are confirmed with the town at permit.
7. Beam spans are confirmed against the span tables accepted by the town at permit.
8. The owner provides about 46 in of clear access for the pile machine and points out any private buried services.
9. Brayman Construction can apply for the building permit on the owner's behalf.

STATUS OF THIS SET
Preliminary construction drawings issued with the estimate of 27 Oct 2026. Not a building permit and not an engineering seal. Final construction follows the issued permit and any conditions of the town.