1 Cover and general notes

1 Oct 2026. Preliminary drawing for pricing and for the permit review. Fifteen helical piers, sixteen joist lines, and ten stair stringers. The 5.00 in stringer throat is a working figure, not a certification. The lower-deck walking surface is 12 in. This is not a town approval and not an engineering seal.

Client	Linda Bushel
Project	Freestanding pressure-treated deck and stairs at an above-ground pool
Location	12 D'Arcy's Way, Kemptville, ON K0G 1J0
Framing	One straight main beam and two wing beams
Pool	21 ft diameter, about 50 in high. Check on site.
Upper deck	18 ft wide. 5 ft clear at the centre. Three straight edges.
Pool edge	Follows the pool curve. Left open. No attachment to the pool.
Stair	10 ft wide, centred. About 38 in between the two decks. Five risers about 7.6 in.
Lower deck	10 ft wide by 3 ft deep, about 12 in above grade.
Gate	42 in clear, centred, swings out, self-closing and self-latching.
Piers	15 helical piers. No sonotubes. No concrete. Product not chosen.

Layout sizes — not yet measured on site

These sizes have not been measured on site. Left and right are from the pool centre, standing at the stairs and looking at the pool. The front edge of the upper deck is 15 ft 6 in from the pool centre. Each side is 9 ft from the centre. The main beam is 12 ft long and centred, 13 ft from the pool centre toward the stairs. The wing piers are 9 ft left and 9 ft right, 8 ft 6 in from the pool centre toward the stairs. Nine piers are under the upper deck and six are under the lower deck.

LOWER-DECK WALKING SURFACE 12 in

The walking surface is 12 in above grade. The double 2x10, 2x8, and decking dress out at 17.5 in. Cut the posts on site. Order the lower 6x6 posts uncut. This sheet does not certify that cut.


CODE AND PERMIT BASIS

Prepared in accordance with the 2024 Ontario Building Code and applicable Municipality of North Grenville zoning, pool-enclosure and permit requirements. Final construction is subject to municipal review and approval, field verification, and all conditions of the issued permit. This note does not mean the permit has been issued.

Sheet index

1 Cover and general notes
2 Dimensioned pier and foundation plan
3 Post, beam, wing, joist, blocking, and header
4 Decking, stair, guard, gate, and skirting
5 Front and side elevations
6 Stair riser, tread, and stringer
7 Typical pier, post, beam, joist, and connectors
8 Field verification, permit, and supplier notes

2 Dimensioned pier and foundation plan

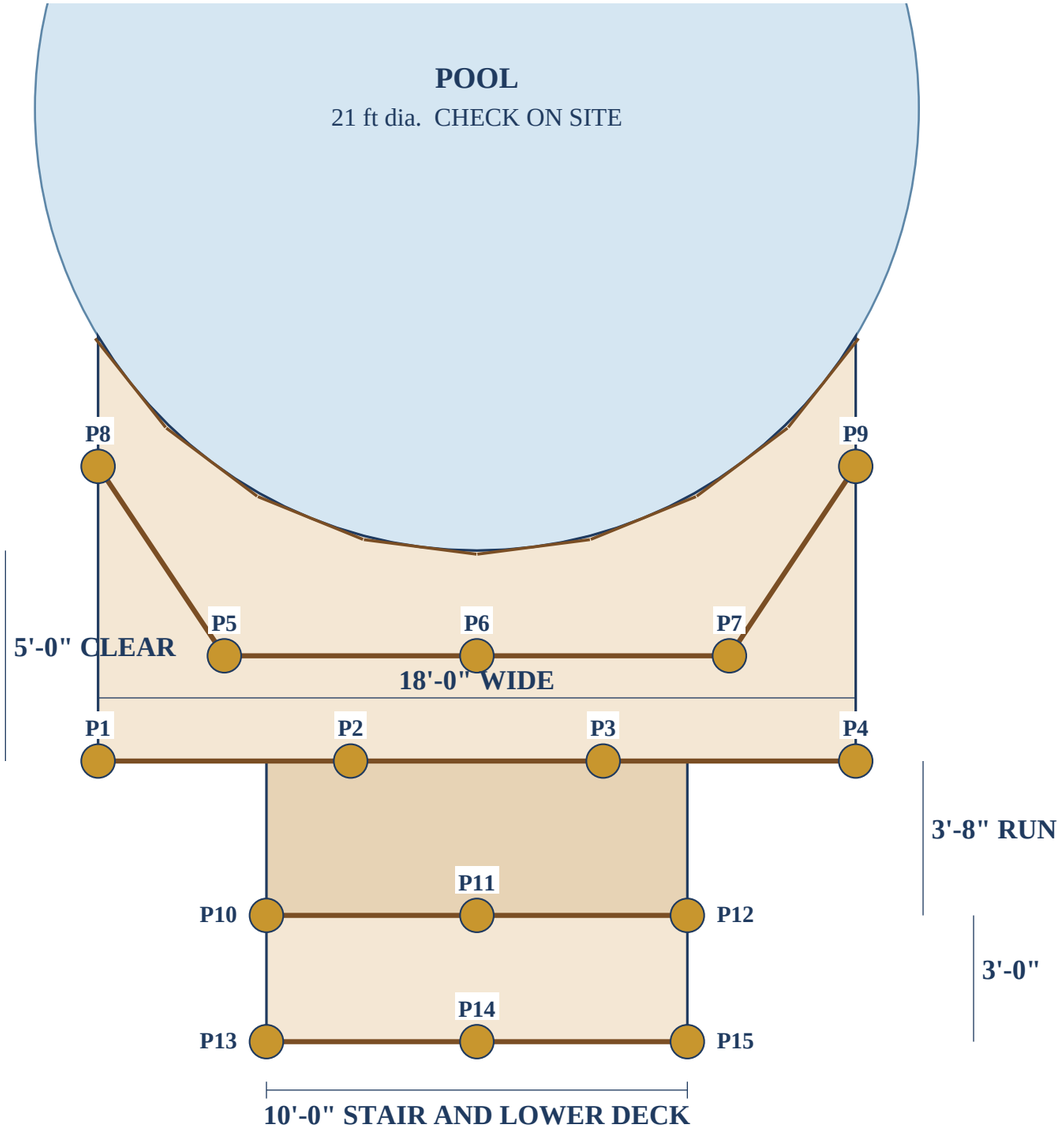

Not a construction scale. Read the written dimensions. The pool is at the top of the sheet.

Notes

P1 to P9 are under the upper deck. P10 to P15 are under the lower deck. Fifteen piers.

Each pier is a helical pier. Shaft, helix, length, and installation torque are not chosen. No sonotubes and no concrete. This sheet does not set the pier capacity.

At the centre, P6 is 2'-6" clear of the pool wall. P8 and P9 are 1'-10 9/16" outside the wall, measured from the pool centre.

No pier is inside the pool. Bearing, frost depth, and the town's pier rules are checked on site and at permit. This sheet does not set them.

Piers along the front beam are 6 ft apart. Piers along the main beam are 6 ft apart. Each side of the lower deck is two 5 ft spaces. Spans are not checked against a span table.

Left and right are from the pool centre, standing at the stairs and looking at the pool. Distances marked out are from the pool centre toward the stairs.


The stair is four treads at 11 in, run 3'-8". The lower deck then runs from 19'-2" to 22'-2" out from the pool centre.

Pier locations

Left and right: standing at the stairs, looking at the pool.
Out: from the pool centre toward the stairs.

P1	9'-0" left	15'-6" out	P9	9'-0" right	8'-6" out
P2	3'-0" left	15'-6" out	P10	5'-0" left	19'-2" out
P3	3'-0" right	15'-6" out	P11	on centre	19'-2" out
P4	9'-0" right	15'-6" out	P12	5'-0" right	19'-2" out
P5	6'-0" left	13'-0" out	P13	5'-0" left	22'-2" out
P6	on centre	13'-0" out	P14	on centre	22'-2" out
P7	6'-0" right	13'-0" out	P15	5'-0" right	22'-2" out
P8	9'-0" left	8'-6" out			

3 Post, beam, wing, joist, blocking, and header plan

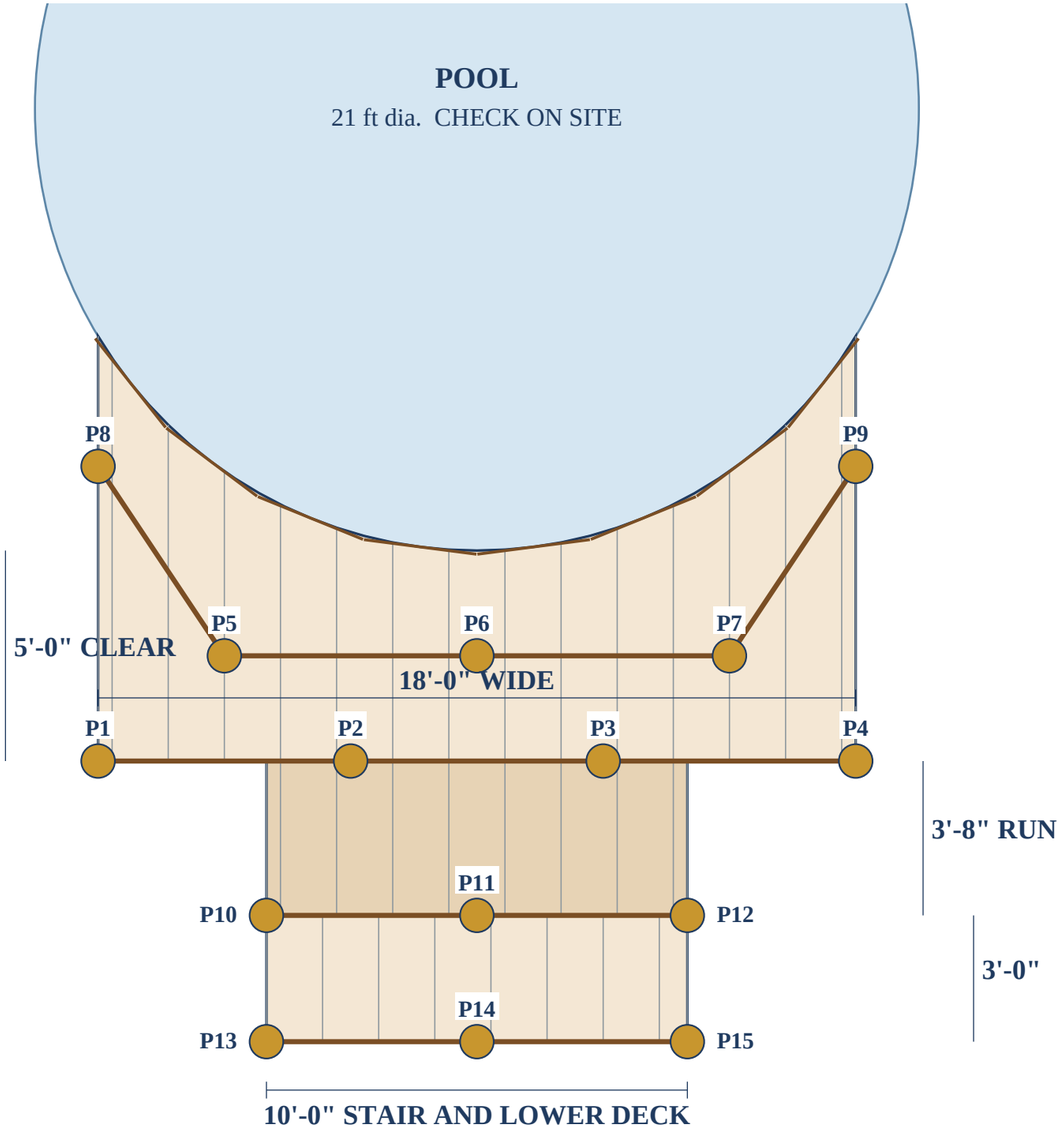

Not a construction scale. Read the written dimensions. The pool is at the top of the sheet.

Notes

Grey lines are 2×8 joists. Brown lines are the double 2×10 beams and the curved 2×8 header.

Joists run square to the 18 ft front, at 16 in on centre maximum. They sit on both outside edges and at 8, 24, 40, 56, 72, 88, and 104 in each side of centre. The last space at each outside edge is 4 in. Sixteen joists.

The main beam is a double 2×10, 12 ft long and centred, 13 ft from the pool centre toward the stairs. Each wing is a double 2×10 from P5 to P8 and from P7 to P9. Each wing is 5.41 ft long.

The front beam is a double 2×10 along the 18 ft front edge, in three 6 ft pieces on each ply, spliced over P2 and P3.


The header at the pool is 8 straight 2×8 pieces, each 2.695 ft. The middle of each piece meets the pool wall. The joints sit 1.04 in off the wall. No piece goes into the pool. Cut the header to the real pool on site.

Joist lengths are measured to the pool wall used on this drawing. The header joints sit up to 1.04 in off that wall.

Blocking in the take-off: 22 pieces of 14.5 in clear in the 16 in spaces at the front beam and the main beam, two short closers in the 4 in spaces, and four wing blocks.

Lower-deck joists are 2×8 at 16 in on centre across the 10 ft width, spanning the 3 ft depth. Walking surface 12 in. Cut the posts on site.

4 Decking, stair, guard, gate, and skirting plan

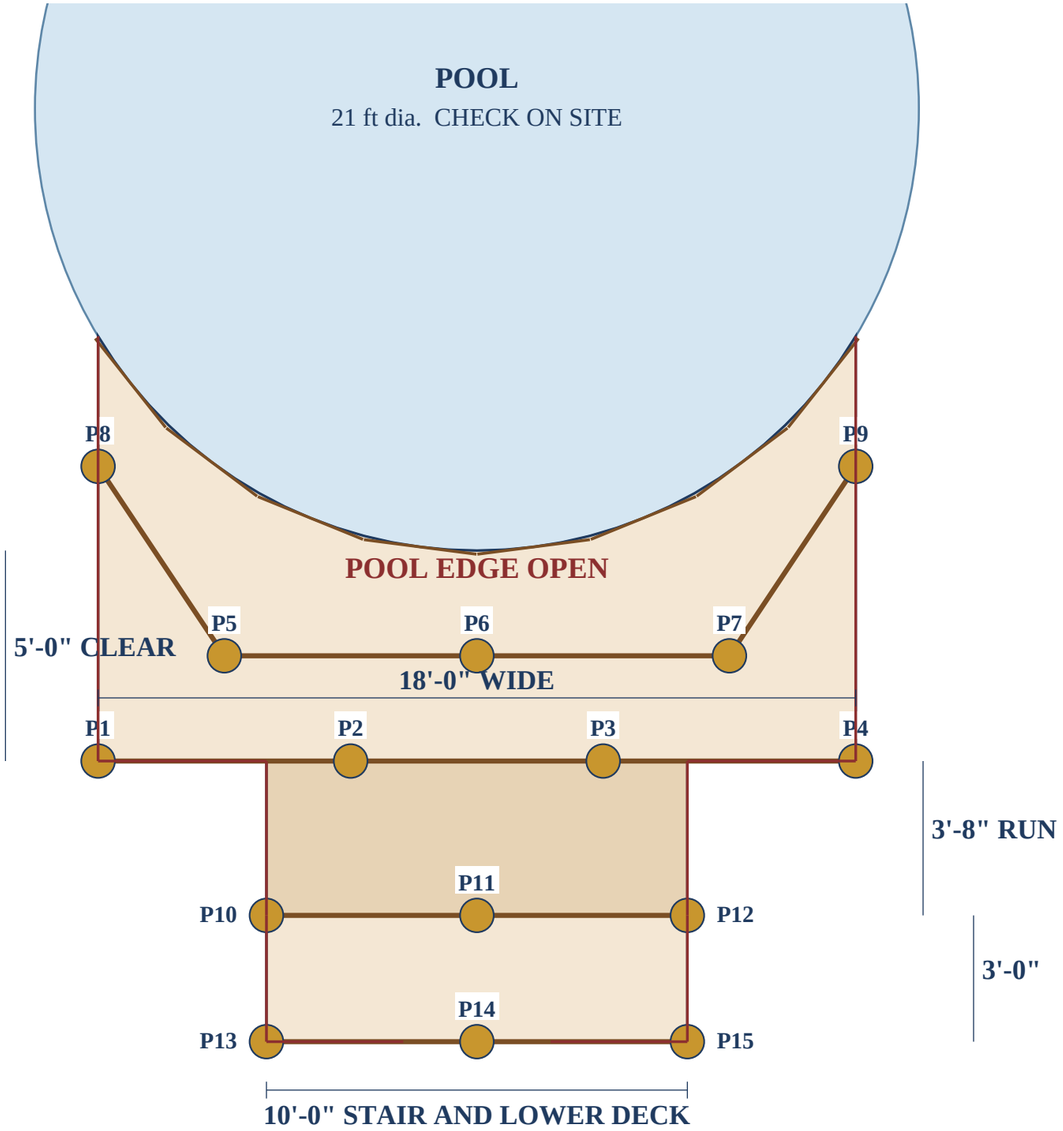

Not a construction scale. Read the written dimensions. The pool is at the top of the sheet.

Notes

Deck boards run parallel to the 18 ft front edge. The count uses the dressed 5.5 in face, with no extra gap. A drainage gap was not specified. If a gap is required, the count changes.

The full-width band is the 5 ft from the pool wall to the front edge: 10 rows at 5.5 in and one row ripped to 5.0 in. Eleven boards, 18 ft long.

Beside the curve, eleven rows each side follow the pool wall on this drawing. Piece lengths are in the take-off. A 0.60 in remainder at the side corners is fitted on site. It is not an extra board.

Red lines are the guard runs. The curved pool edge is open. There is no centre handrail on the stairs.

Straight runs are counted as Veranda 37 in by 6 ft kits, one kit for each started 6 ft on a straight run. A kit is not assumed to turn a corner or to be cut in half.

The stair guards and the gate are custom, matched to Home Depot HDDR2022005, SKU 1001900458. That number is not confirmed as a BMR stock item.


The skirt is the lower deck only: vertical 1×6, tight, on the two sides and the front, including under the gate. Upper-deck skirting is not in this count.

The gate opening is 42 in clear, centred on the 10 ft lower front. The guard each side of the gate is 3.25 ft.

5 Front and side elevations

Same scale on both views, about 7/16 in = 1 ft. Members are drawn. The rail is the 37 in kit, shown so the view can be read. Helical shaft is drawn short. Length, helix, and torque are not chosen. No concrete. No attachment to the pool.


Side — along the 18 ft edge, stair to the right

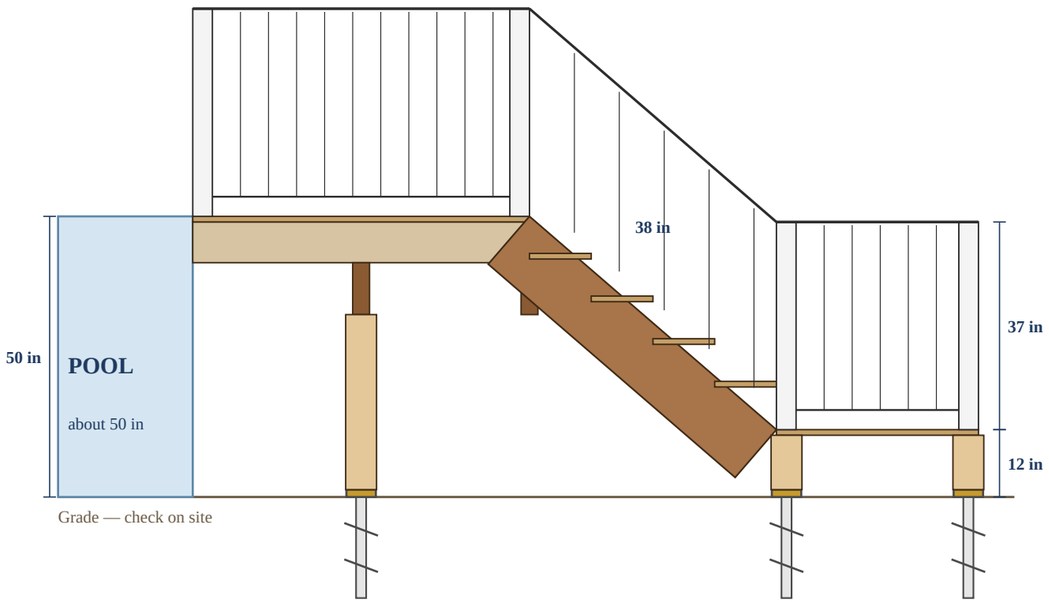

6×6 on a helical pier. Joist on a double 2×10.

Lower deck. Cut the post on site.

Front — standing at the lower entrance

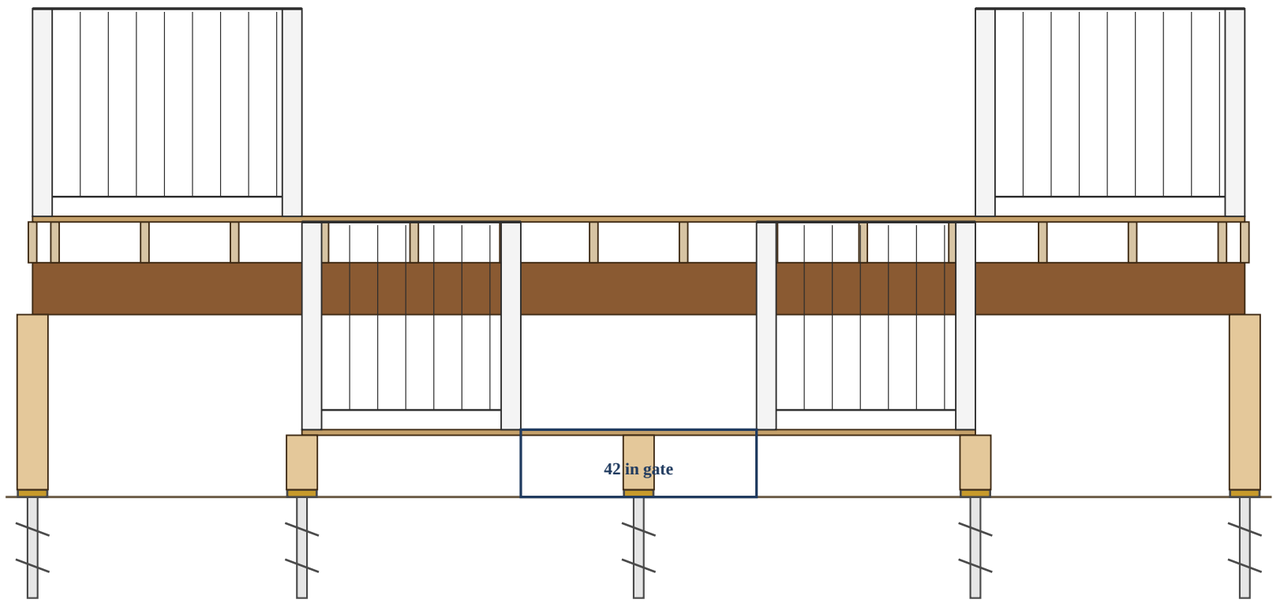


Joist ends on the front double 2×10. Outer posts shown. Posts behind the lower deck are on the plan.

Upper frame is 1 in decking, 7.25 in joist, and 9.25 in beam under a 50 in walking surface. The lower walking surface is 12 in. The 17.5 in stack does not fit there. Cut those posts on site.

6 Stair riser, tread, and stringer

Five risers of about 7.6 in and treads of about 11 in, over about 38 in. Four treads are drawn because the upper deck is the top landing. Adjust the rise and run on site. This sheet does not certify the stair.

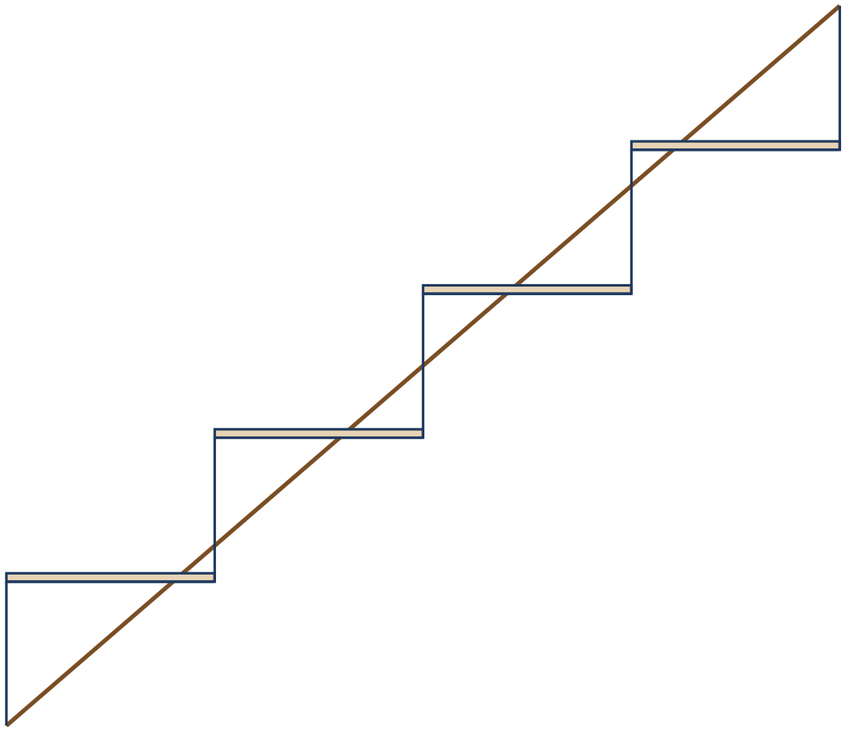

Total run 3'-8" Total rise 3'-2" Stringer cut basis 58.1 in

Each tread is two 5/4 × 6 boards, 10 ft long. No centre handrail.


Stringer count

Ten 2×12 stringers across the 10 ft width, at 16 in on centre maximum, with a 4 in space at each edge. Slope length 58.1 in. Buy 8 ft stock. Working throat 5.00 in. The calculated figure is 4.997 in. This is not an engineering certification. The plumb cuts are not drawn on this sheet.

CHECK RISE AND RUN ON SITE

Pool height, lower-deck height, and finished grade move the 38 in difference. Keep five equal risers only after the two surfaces are measured.

7 Typical helical pier, bracket, post, beam, and joist

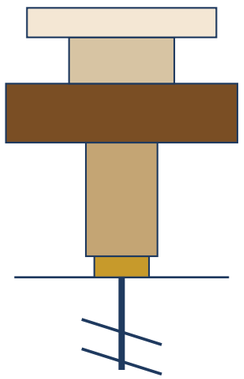

5/4×6 decking, dressed as 1 in

2×8 joist

Double 2×10 beam

6×6 post. Do not precut.

Post bracket. Confirm it is included.

Helical pier. Product not specified.

If the bracket adds no height: 50 – 1 – 7.25 – 9.25 = 32.5 in under the beam.
The bracket height is not known. Do not cut the posts in advance. No concrete.

LOWER DECK 12 in
The walking surface is 12 in above grade. Beam, joist, and decking dress out at 17.5 in. Cut the posts on site before construction. Order the lower 6×6 posts uncut.

Connector count

These counts match the members drawn. They are not a manufacturer's specified system.
15 helical-pier brackets, one per pier. Confirm the pier does not already include the bracket.
15 post-to-beam connectors, one per post. Product not chosen.
16 angled connectors where the upper joists meet the curved header.
10 stringer connectors at the top of the stairs.
Joists sit on top of the straight beams: two structural screws at each bearing.
Deck screws: two at each board crossing of a joist or stringer. The count is in the take-off.
Beam stitch bolts, for pricing only: two rows at 16 in on centre between posts.
That stitch is 76 bolts with nuts and washers. The diameter is not chosen. It is not an engineered bolt layout.
Blocking for the guard posts is required and is not counted here. The pattern is not drawn.
Exterior-rated, corrosion-resistant, and compatible with pressure-treated lumber.

4×4 guard posts are listed separately from the rail kits.
Confirm the kit does not already include posts.

8 Field verification, permit, and supplier notes

1. Pool diameter and height. The 21 ft and 50 in figures are approximate.
2. Finished grades, installed pool elevation, setbacks, and property limits.
3. Helical pier product, depth, torque, and bearing. The old 48 in sonotube depth is not used. Capacity is not certified.
4. Keep the deck off the pool. No attachment is specified. No clearance dimension was measured. The header pieces meet the pool wall at mid-length and sit about 1.04 in off the wall at the joints.
5. Stair rise and run after both deck surfaces are measured.
6. Guard height. The rail product is 37 in. An earlier note said about 42 in. Another note puts about 49 in from grade to the top of the lower rail and leaves the 1.2 m pool-enclosure rule for the town to confirm. Those figures are not averaged.
7. The lower-deck walking surface is 12 in. Cut the posts on site. Beam, joist, and decking dress out at 17.5 in. Do not cut the lower posts in advance.
8. Beam spans against the span table the town accepts. Not checked here.
9. Veranda rails: whether a 6 ft kit can be cut, and whether the posts are already in the kit.
10. Delivery address is 12 D'Arcy's Way, Kemptville, ON K0G 1J0. The material request has not been sent.

WHAT THIS SET DOES NOT DO

No permit. No engineering seal. The 5.00 in stringer throat is not certified. No Brayman cost, customer price, or margin. The supplier paper is a request for a price. It has not been sent. Darcy's price will set the material cost.

The take-off and the request to Darcy are with this set. Contractor price, availability, substitution, and delivery timing are blank.