


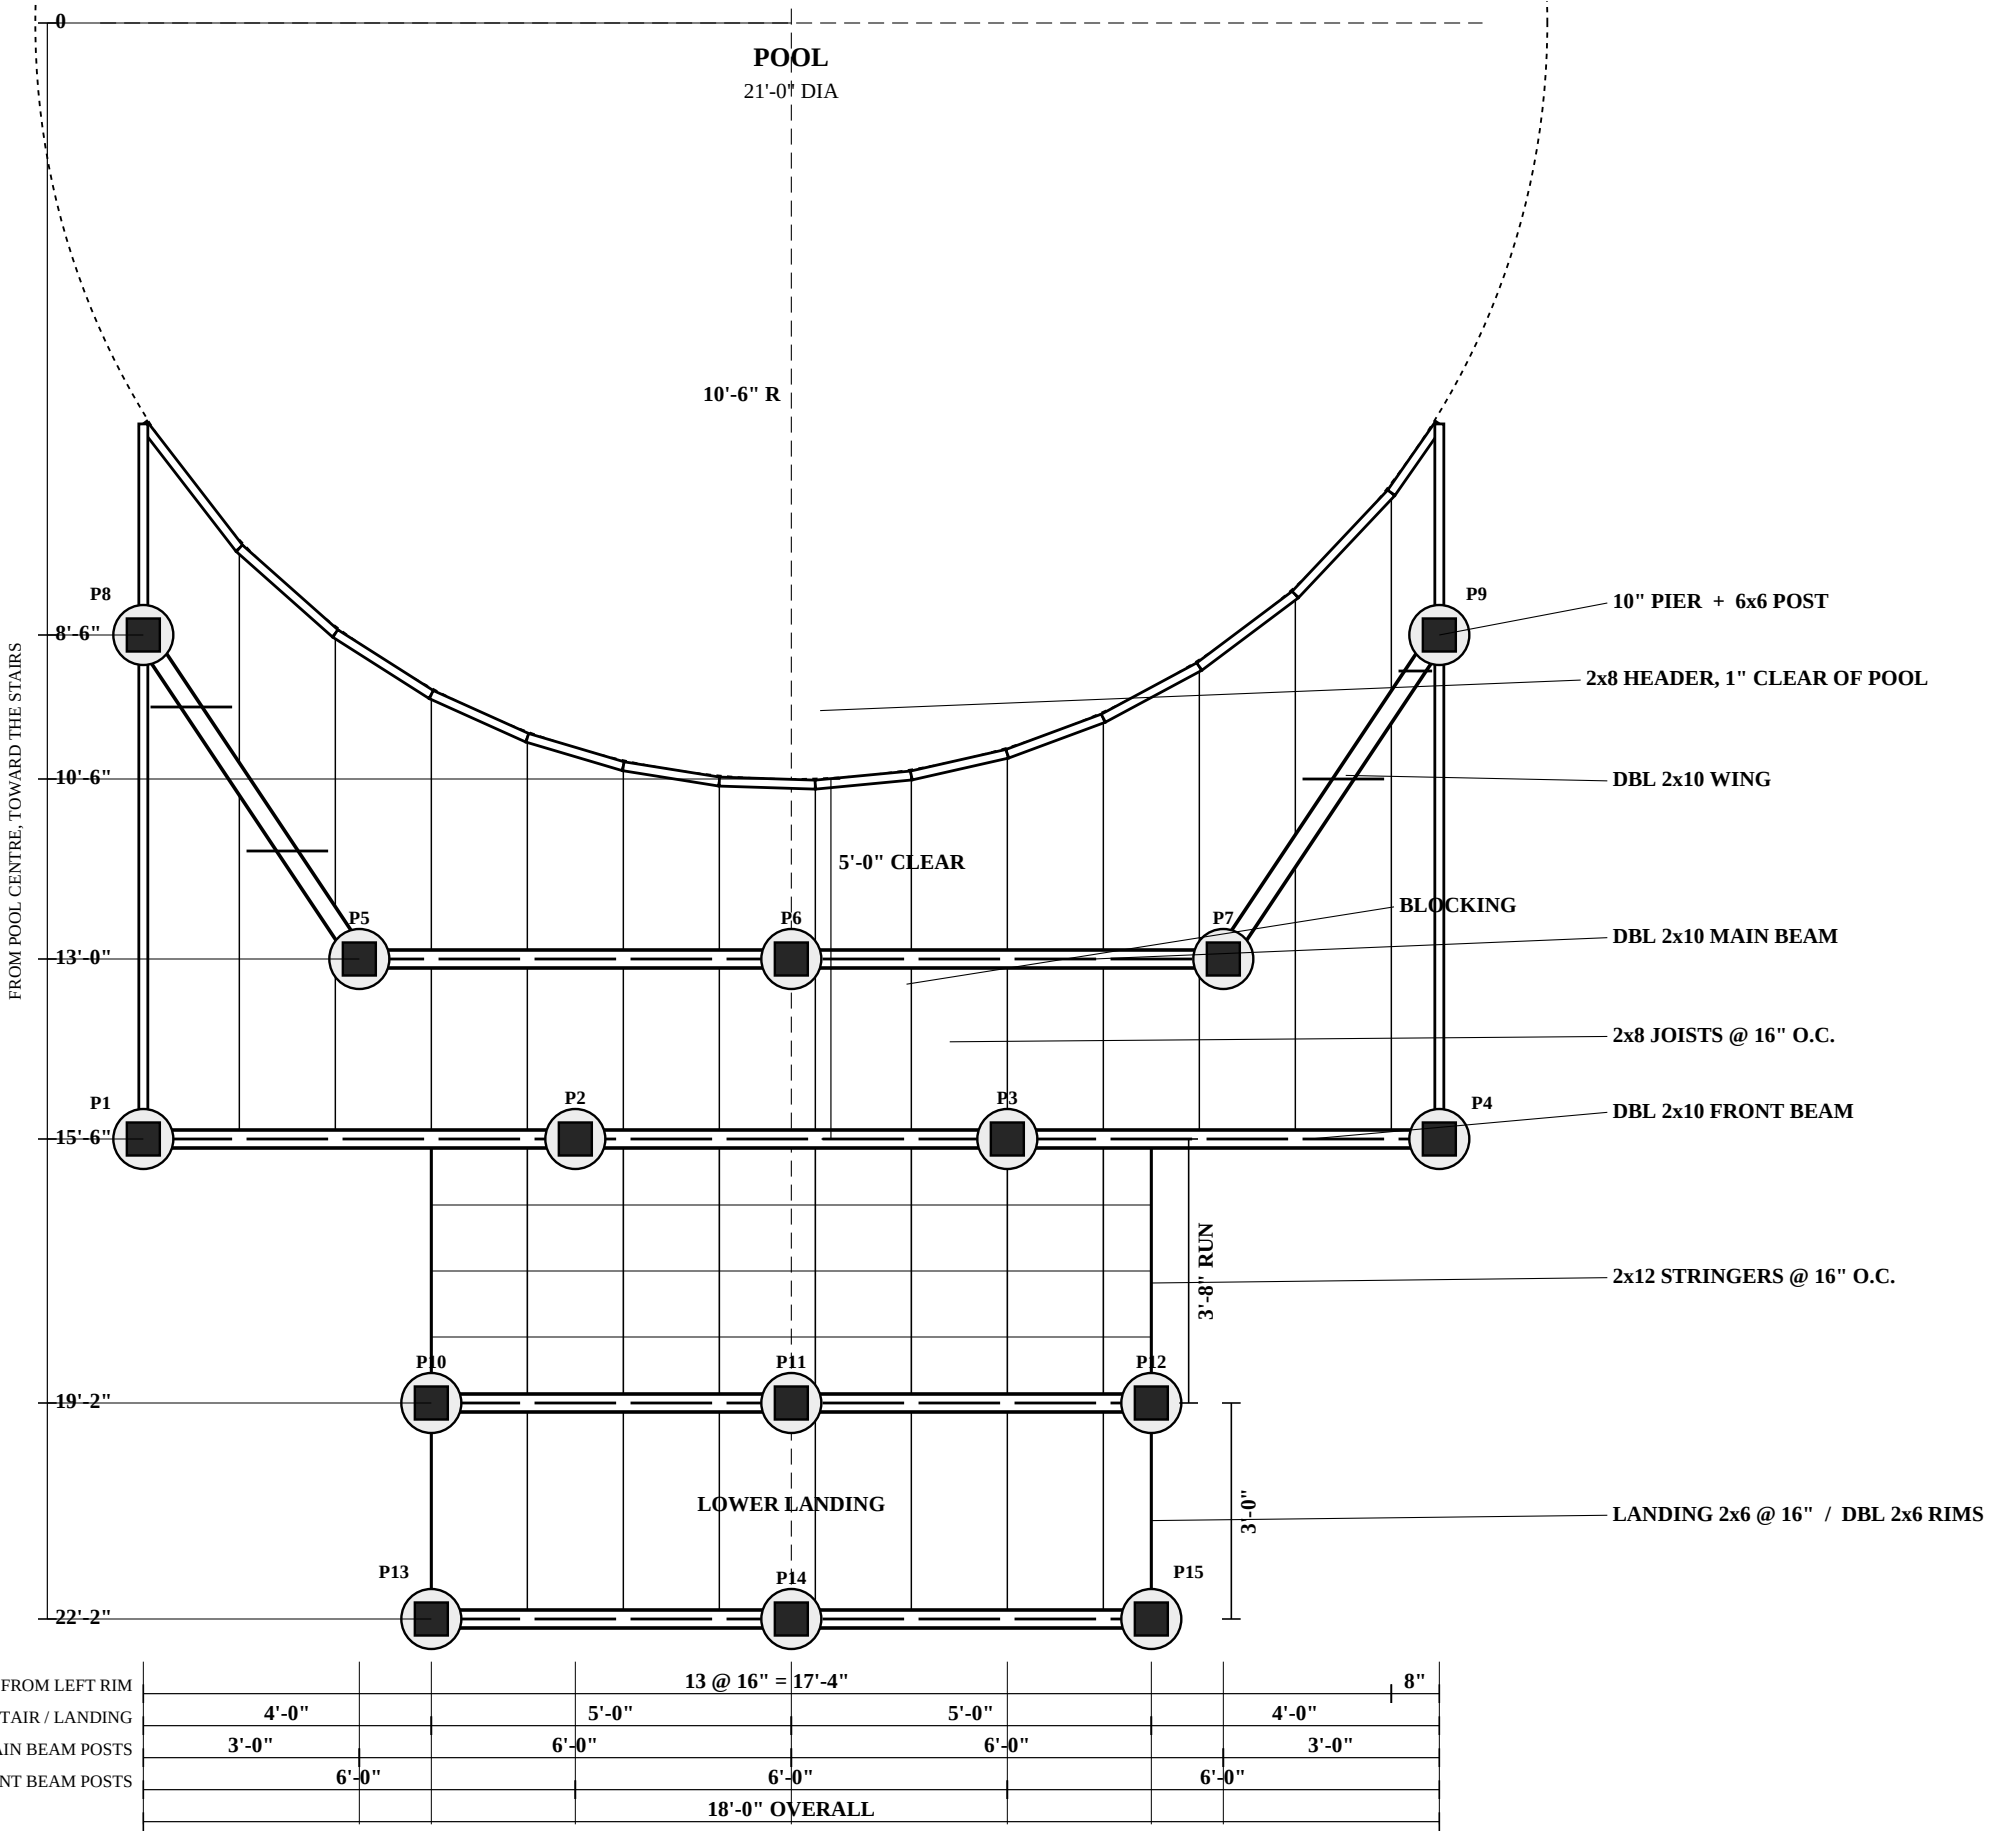


PIER SCHEDULE

10 in sonotube. 6x6 post on centre. Field-cut. Do not precut.

MARK	X	Y	ON
P1	-9'-0"	15'-6"	Front beam
P2	-3'-0"	15'-6"	Front beam
P3	3'-0"	15'-6"	Front beam
P4	9'-0"	15'-6"	Front beam
P5	-6'-0"	13'-0"	Main beam / wing
P6	0'-0"	13'-0"	Main beam
P7	6'-0"	13'-0"	Main beam / wing
P8	-9'-0"	8'-6"	Wing end
P9	9'-0"	8'-6"	Wing end
P10	-5'-0"	19'-2"	Landing back
P11	0'-0"	19'-2"	Landing back
P12	5'-0"	19'-2"	Landing back
P13	-5'-0"	22'-2"	Landing front
P14	0'-0"	22'-2"	Landing front
P15	5'-0"	22'-2"	Landing front

LOWER LANDING SECTION

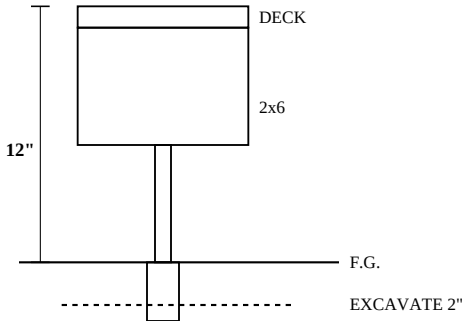

STAIR

5 equal risers at 7.6 in (193 mm).
4 treads at 11 in (279 mm). Run 3'-8".
Upper deck is the top landing.
No centre handrail.
Stringer profile and connections: CT-2.
OBC 2024 private stair: rise 125–200 mm,
run 255–355 mm. This flight is inside both.

FIELD VERIFY

Actual pool centre, diameter, and position.
Finished grade and soil bearing.
48 in pier depth is the recorded basis.

Prepared in accordance with the 2024 Ontario Building Code and applicable Municipality of North Grenville zoning, pool-enclosure and permit requirements. Final construction is subject to municipal review and approval, field verification, and all conditions of the issued permit.

LINDA BUSHEL — FOUNDATION + FRAMING PLAN

CONSTRUCTION DRAWING CAPABILITY TEST — JOEL REVIEW — NOT FINAL

D'Arcy's Way, Kemptville, ON K0G 1J0

Brayman Construction Inc., 411 St. John Street

Merrickville, ON K0G 1N0

Scale 3/8 in = 1 ft-0 in. Origin: pool centre.

Left rim is on the left when facing the pool.

CT-1 FRAMING

29 Sep 2026

11 x 17 in

Not a permit. Not a seal.