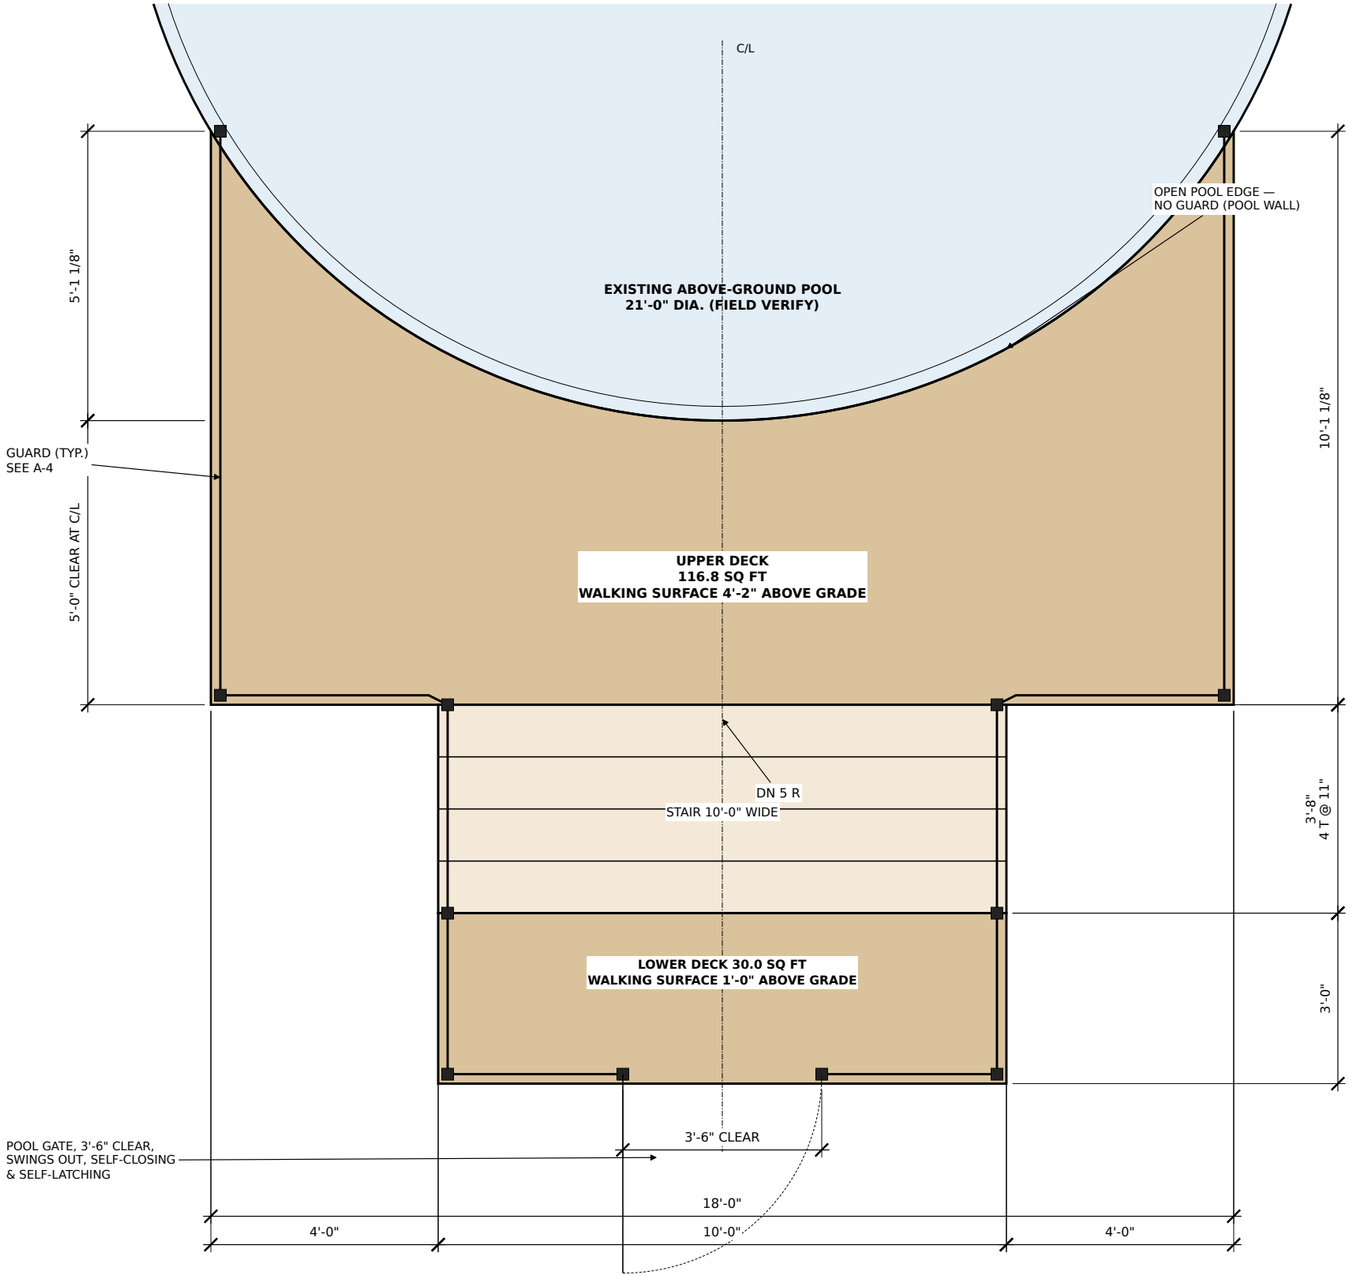


1 **GENERAL ARRANGEMENT PLAN**

SCALE: 3/8" = 1'-0"

DRAWING INDEX

SHEET	TITLE
A-1	GENERAL ARRANGEMENT & DIMENSION PLAN
A-2	DECKING LAYOUT PLAN
S-1	HELICAL PIER & FOUNDATION PLAN
S-2	FRAMING PLAN
A-3	STAIR PLAN, SECTION & DETAILS
A-4	ELEVATIONS & BUILDING SECTION
G-1	SCHEDULES, OPEN ITEMS & NOTES

DESIGN DATA (FROM CONSTRUCTION MODEL)

ITEM	VALUE
Pool diameter (verify)	21'-0"
Upper deck width	18'-0"
Upper deck, pool centre to front	15'-6"
Clear depth at centreline	5'-0"
Sides meet pool (from centre)	5'-4 7/8"
Upper deck area	116.8 sq ft
Open pool edge	21'-7 1/2"
Upper walking surface	4'-2" above grade
Stair	5 R @ 7 5/8", 4 T @ 11"
Lower deck	10'-0" x 3'-0", 1'-0" above grade
Pool gate	3'-6" clear, swings out
Helical piers	15 locations (S-1)

GENERAL NOTES

1. These sheets are generated from construction model revision R1 and the calculated material takeoff. Drawing and takeoff come from the same model and must agree.
2. PRELIMINARY — NOT FOR CONSTRUCTION. Not engineered, not sealed, and not a permit approval. Open engineering items are listed on G-1.
3. Pool diameter, wall height, elevations and grades are from the preliminary drawing and are not measured on site. Verify before cutting or ordering.
4. Dimensions govern; do not scale from the drawing. Plan dimensions are to the outside of deck framing unless noted.
5. Deck boards, fascia, railing and gate are installed to the selected manufacturers' instructions.
6. Pool barrier: the gate is outward-swinging, self-closing and self-latching. Barrier height and hardware to be confirmed with the authority having jurisdiction.

PRELIMINARY — NOT FOR CONSTRUCTION


Brayman Construction

Brayman Construction Inc.
411 St. John Street, Merrickville, Ontario K0G 1N0

PROJECT
Harbour Lane Pool Deck
48 Harbour Lane, Merrickville, ON K0G 1N0

DRAWING
GENERAL ARRANGEMENT & DIMENSION PLAN

SCALE	DATE	SHEET
3/8" = 1'-0"	2026-10-16	A-1
DRAWING REVISION	MODEL REVISION	1 OF 7
D1 SET DD3A726E7C	R1	

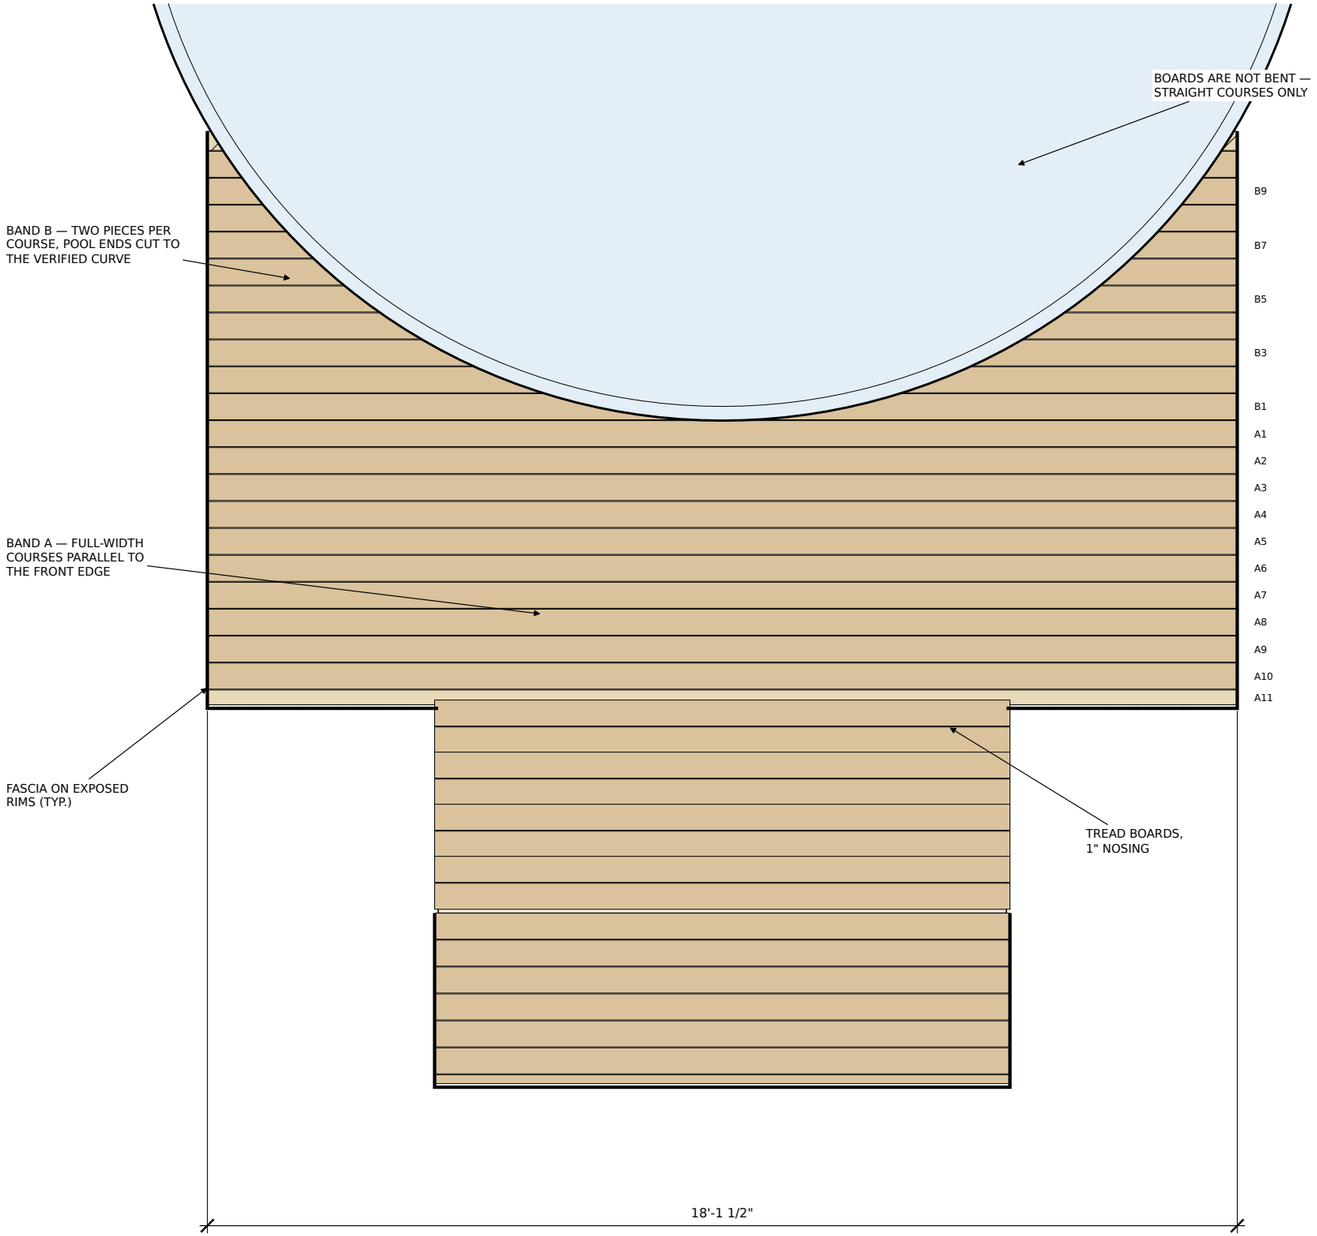

1 DECKING LAYOUT PLAN

SCALE: 3/8" = 1'-0"

DECK BOARD SCHEDULE (FROM TAKEOFF)

ROW	KIND	WIDTH	PCS	LENGTH
A1	full	5 1/2"	1	18'-1 1/2"
A2	full	5 1/2"	1	18'-1 1/2"
A3	full	5 1/2"	1	18'-1 1/2"
A4	full	5 1/2"	1	18'-1 1/2"
A5	full	5 1/2"	1	18'-1 1/2"
A6	full	5 1/2"	1	18'-1 1/2"
A7	full	5 1/2"	1	18'-1 1/2"
A8	full	5 1/2"	1	18'-1 1/2"
A9	full	5 1/2"	1	18'-1 1/2"
A10	full	5 1/2"	1	18'-1 1/2"
A11	ripped	3 1/8"	1	18'-1 1/2"
B1	curve	5 1/2"	2	8'-5 7/8"
B2	curve	5 1/2"	2	5'-10 3/4"
B3	curve	5 1/2"	2	4'-8"
B4	curve	5 1/2"	2	3'-9 1/8"
B5	curve	5 1/2"	2	3'-0 1/4"
B6	curve	5 1/2"	2	2'-4 13/16"
B7	curve	5 1/2"	2	1'-10 5/16"
B8	curve	5 1/2"	2	1'-4 11/16"
B9	curve	5 1/2"	2	0'-11 11/16"
B10	curve	5 1/2"	2	0'-7 1/4"
B-corner	corner rip	4 1/16"	2	0'-3 5/16"
L1	full	5 1/2"	1	10'-1 1/2"
L2	full	5 1/2"	1	10'-1 1/2"
L3	full	5 1/2"	1	10'-1 1/2"
L4	full	5 1/2"	1	10'-1 1/2"
L5	full	5 1/2"	1	10'-1 1/2"
L6	full	5 1/2"	1	10'-1 1/2"
L7	ripped	1 7/8"	1	10'-1 1/2"
Treads	4 treads	5 1/2"	2/tread	10'-1 1/2"

DECKING NOTES

1. Board: Capped composite deck board, 5.5 in; 5 1/2" wide with 3/16" side gap; 3/4" end overhang. Values are product facts recorded for this takeoff.
2. Band A courses run from the pool apex to the front edge across the full width. The last course is ripped where shown.
3. Band B courses run from the pool apex back to where the sides meet the pool. Lengths are measured at the long edge, so the curve cut always comes off the piece.
4. Mark the pool wall on each band B board in place before cutting. Do not pre-cut from these lengths.
5. Fastening, end-joint and gapping rules are by the board manufacturer.

PRELIMINARY — NOT FOR CONSTRUCTION


Brayman Construction

Brayman Construction Inc.
411 St. John Street, Merrickville, Ontario K0G 1N0

PROJECT
Harbour Lane Pool Deck
48 Harbour Lane, Merrickville, ON K0G 1N0

DRAWING
DECKING LAYOUT PLAN

SCALE	DATE	SHEET
3/8" = 1'-0"	**2026-10-16**	**A-2**
DRAWING REVISION **D1** SET DD3A726E7C	MODEL REVISION **R1**	2 OF 7

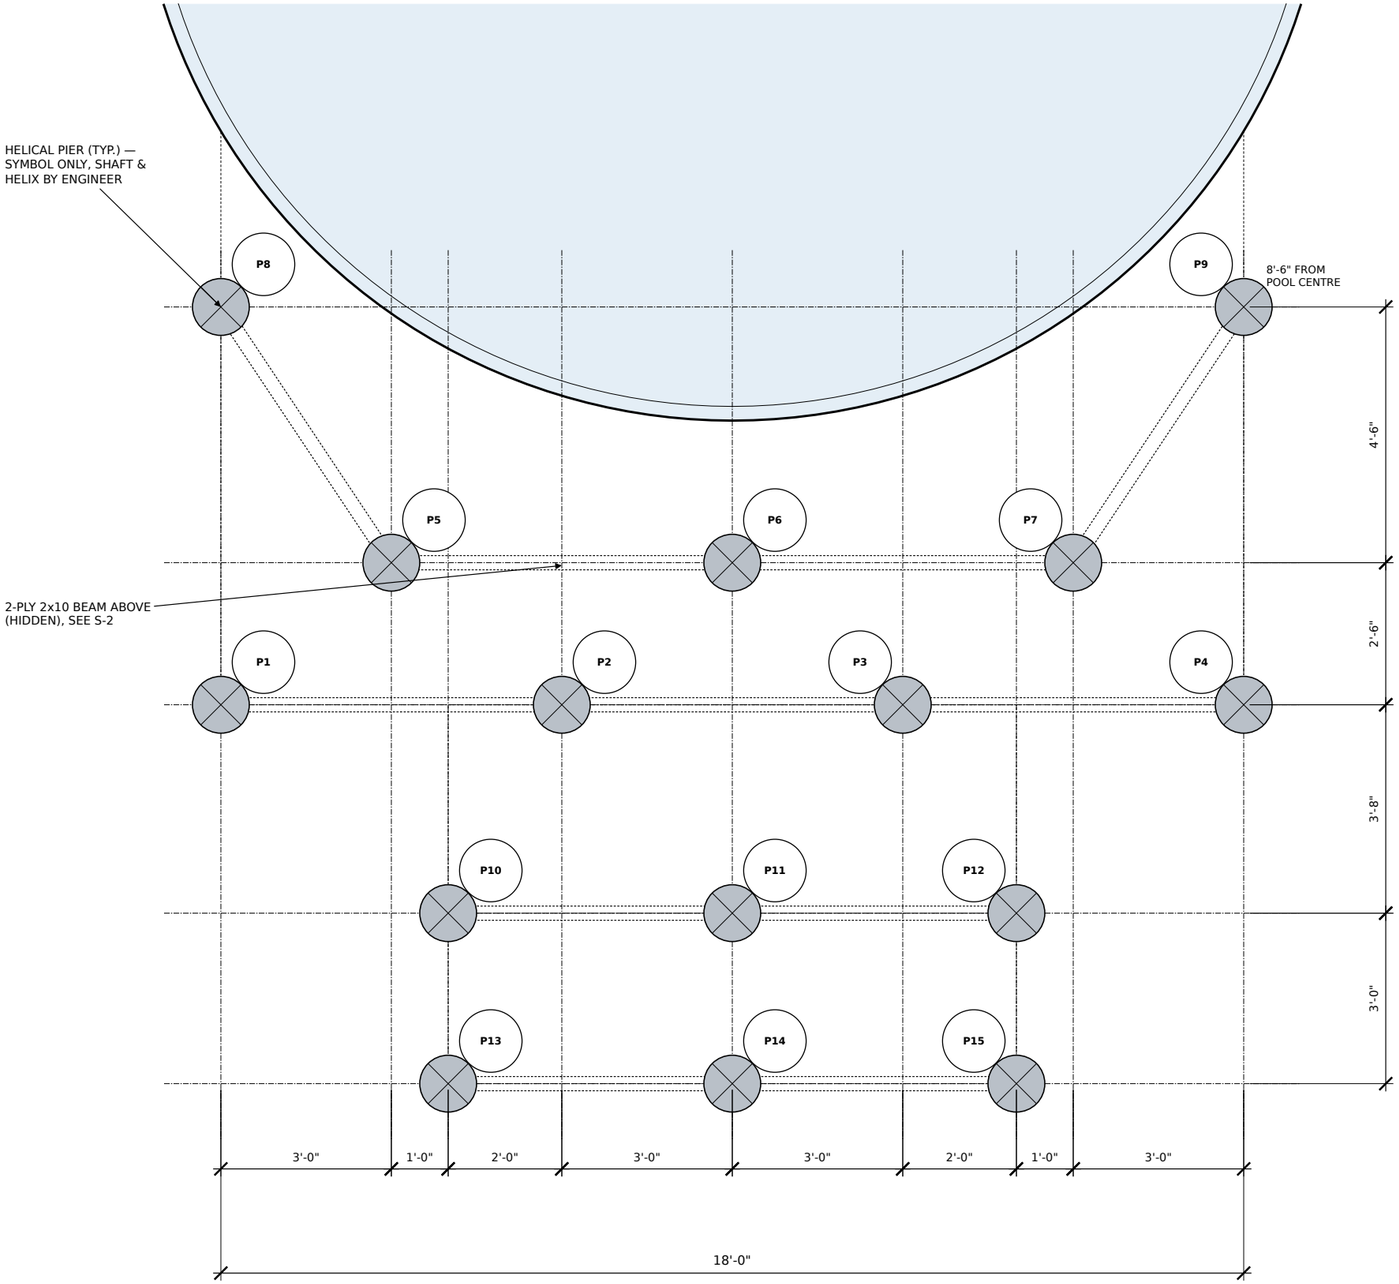

1 HELICAL PIER & FOUNDATION PLAN

SCALE: 3/8" = 1'-0"

HELICAL PIER SCHEDULE (FROM MODEL)

PIER	X FROM C/L	Y FROM POOL C	SUPPORTS BEAM
P1	-9'-0"	15'-6"	front
P2	-3'-0"	15'-6"	front
P3	3'-0"	15'-6"	front
P4	9'-0"	15'-6"	front
P5	-6'-0"	13'-0"	main, wing-left
P6	0'-0"	13'-0"	main
P7	6'-0"	13'-0"	main, wing-right
P8	-9'-0"	8'-6"	wing-left
P9	9'-0"	8'-6"	wing-right
P10	-5'-0"	19'-2"	lower-back
P11	0'-0"	19'-2"	lower-back
P12	5'-0"	19'-2"	lower-back
P13	-5'-0"	22'-2"	lower-front
P14	0'-0"	22'-2"	lower-front
P15	5'-0"	22'-2"	lower-front

FOUNDATION NOTES

1. 15 helical piers at the drawn locations. No sonotubes and no concrete (model).
2. Helical pier shaft, helix, embedment, installation torque and capacity are by the pier manufacturer's engineer. Not shown or implied here.
3. Post-to-pier bracket by the pier manufacturer. Whether the pier includes the bracket is a product fact still open.
4. Upper posts are cut to 2'-8 1/2" for a pier head at grade and zero bracket height. Field verify before cutting.
5. Lower-deck posts are ordered uncut and cut on site.
6. X is measured from the pool centreline; Y is measured out from the pool centre.

PRELIMINARY — NOT FOR CONSTRUCTION


Brayman Construction

Brayman Construction Inc.
411 St. John Street, Merrickville, Ontario K0G 1N0

PROJECT
Harbour Lane Pool Deck
48 Harbour Lane, Merrickville, ON K0G 1N0

DRAWING
HELICAL PIER & FOUNDATION PLAN

SCALE	DATE	SHEET
3/8" = 1'-0"	**2026-10-16**	**S-1**
DRAWING REVISION **D1** SET DD3A726E7C	MODEL REVISION **R1**	3 OF 7

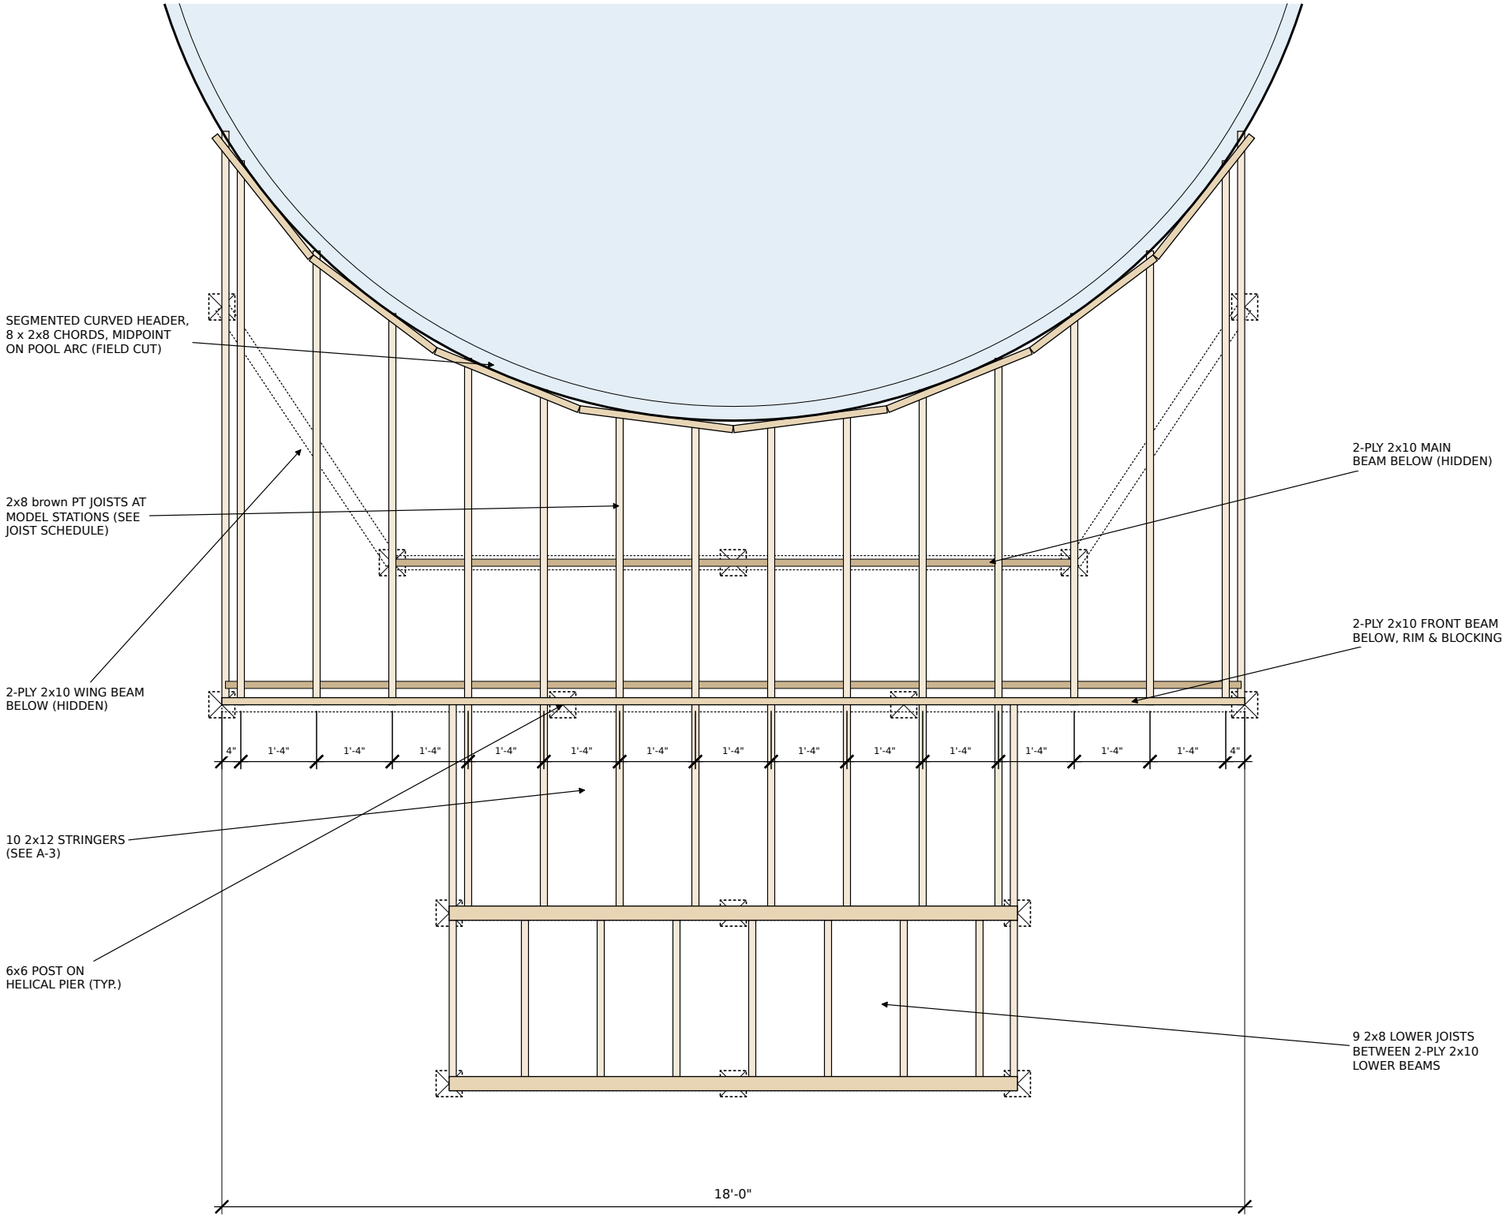

1 **FRAMING PLAN**

SCALE: 3/8" = 1'-0"

UPPER JOIST SCHEDULE (FROM TAKEOFF)

JOIST	STATION	POOL WALL TO FRONT
J1	-9'-0"	10'-1 1/8"
J2	-8'-8"	9'-6 7/8"
J3	-7'-4"	7'-11 13/16"
J4	-6'-0"	6'-10 5/8"
J5	-4'-8"	6'-1 1/8"
J6	-3'-4"	5'-6 1/2"
J7	-2'-0"	5'-2 5/16"
J8	-0'-8"	5'-1/4"
J9	0'-8"	5'-1/4"
J10	2'-0"	5'-2 5/16"
J11	3'-4"	5'-6 1/2"
J12	4'-8"	6'-1 1/8"
J13	6'-0"	6'-10 5/8"
J14	7'-4"	7'-11 13/16"
J15	8'-8"	9'-6 7/8"
J16	9'-0"	10'-1 1/8"

FRAMING MEMBERS (MODEL)

MEMBER	SIZE / COUNT
Upper joists	16 x 2x8
Header	8 chords x 2'-8 5/16"
Beams	2-ply 2x10
Blocking	24 x 2x8
Stringers	10 x 2x12
Lower joists	9 x 2x8
Posts	15 x 6x6

FRAMING NOTES

1. Member sizes are the model's retained framing specification (brown PT). Not engineered; adequacy by designer/engineer.
2. Joist lengths are cut lengths from the pool wall to the front edge at each station. Field verify against the pool wall before cutting.
3. Header chords are straight segments outside the pool with their midpoints on the arc. Field cut to the verified pool wall.
4. Connectors (joist, stringer, post-to-beam) and stitch bolts are listed on G-1 as engineering-dependent.

PRELIMINARY — NOT FOR CONSTRUCTION


Brayman Construction

Brayman Construction Inc.
411 St. John Street, Merrickville, Ontario K0G 1N0

PROJECT
Harbour Lane Pool Deck
48 Harbour Lane, Merrickville, ON K0G 1N0


DRAWING
FRAMING PLAN

SCALE	DATE	SHEET
3/8" = 1'-0"	**2026-10-16**	**S-2**
DRAWING REVISION: **D1** SET DD3A726E7C	MODEL REVISION: **R1**	4 OF 7

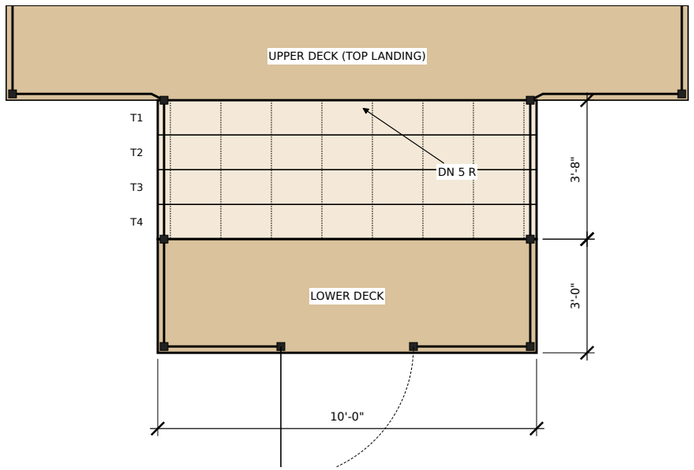

1 STAIR PLAN

SCALE: 1/4" = 1'-0"

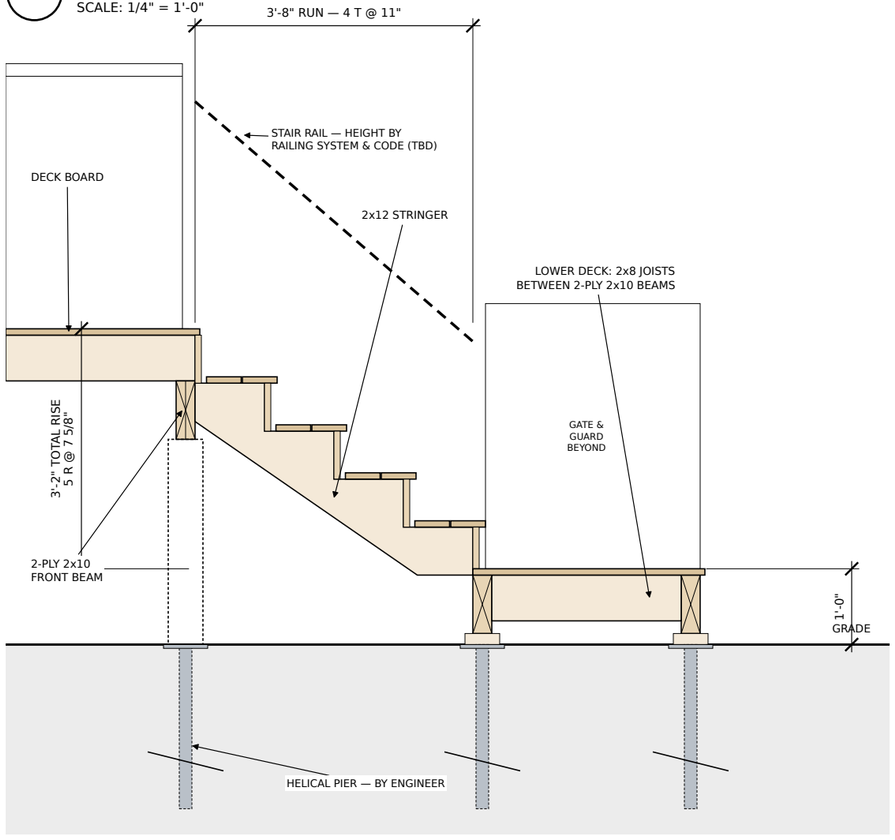


2 STAIR SECTION AT CENTRELINE

SCALE: 1/2" = 1'-0"

STRINGER STATIONS (MODEL)

STRINGER	FROM C/L	TO NEXT
S1	-5'-0"	4"
S2	-4'-8"	1'-4"
S3	-3'-4"	1'-4"
S4	-2'-0"	1'-4"
S5	-0'-8"	1'-4"
S6	0'-8"	1'-4"
S7	2'-0"	1'-4"
S8	3'-4"	1'-4"
S9	4'-8"	4"
S10	5'-0"	—

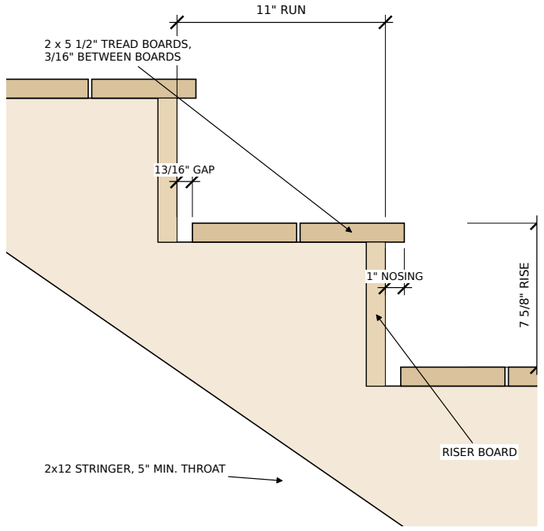

3 TREAD / RISER DETAIL

SCALE: 1-1/2" = 1'-0"

STAIR DATA (FROM MODEL & TAKEOFF)

ITEM	VALUE
Total rise	3'-2"
Risers	5 @ 7 5/8"
Treads	4 @ 11" run
Nosing past riser	1"
Tread boards	2 per tread (takeoff)
Back gap at riser above	13/16"
Total run	3'-8"
Width	10'-0"
Stringers	10 x 2x12, max 16" o.c.
Throat	5"
Landings	Upper deck (top), lower deck (bottom)

STAIR NOTES

1. Stair geometry is the model's: the upper deck is the top landing, with one more riser than treads.
2. Confirm rise and run against the applicable code and the field-measured lower walking surface before cutting stringers.
3. Stair rail height, graspability and guard infill are by the railing system and the authority having jurisdiction.
4. Stringer hanger at the front beam and bearing at the lower deck: product and capacity by designer (G-1).


PRELIMINARY — NOT FOR CONSTRUCTION

Brayman Construction
Brayman Construction Inc.
411 St. John Street, Merrickville, Ontario K0G 1N0

PROJECT
Harbour Lane Pool Deck
48 Harbour Lane, Merrickville, ON K0G 1N0


DRAWING
STAIR PLAN, SECTION & DETAILS

SCALE	DATE	SHEET
AS NOTED	**2026-10-16**	**A-3**
DRAWING REVISION **D1** SET DD3A726E7C	MODEL REVISION **R1**	5 OF 7

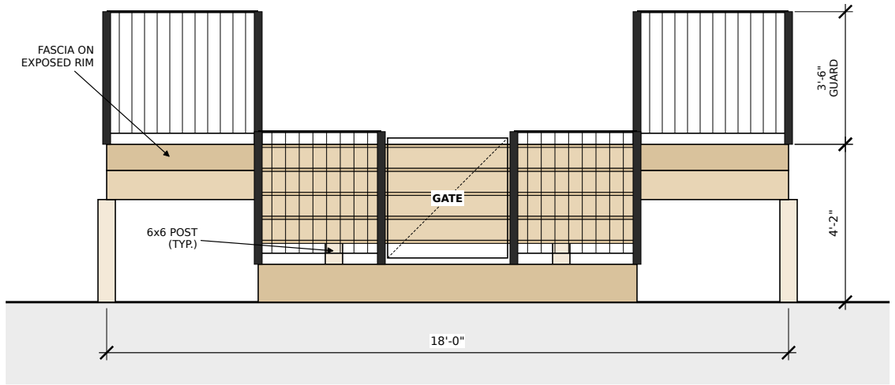


1 FRONT ELEVATION (FROM THE YARD)

SCALE: 1/4" = 1'-0"

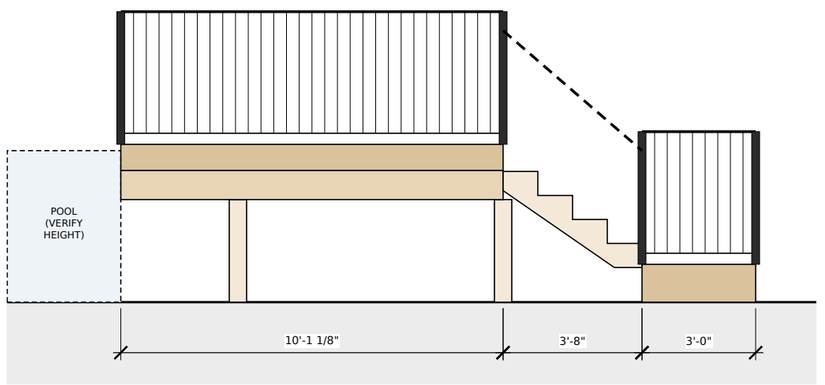

2 SIDE ELEVATION

SCALE: 1/4" = 1'-0"

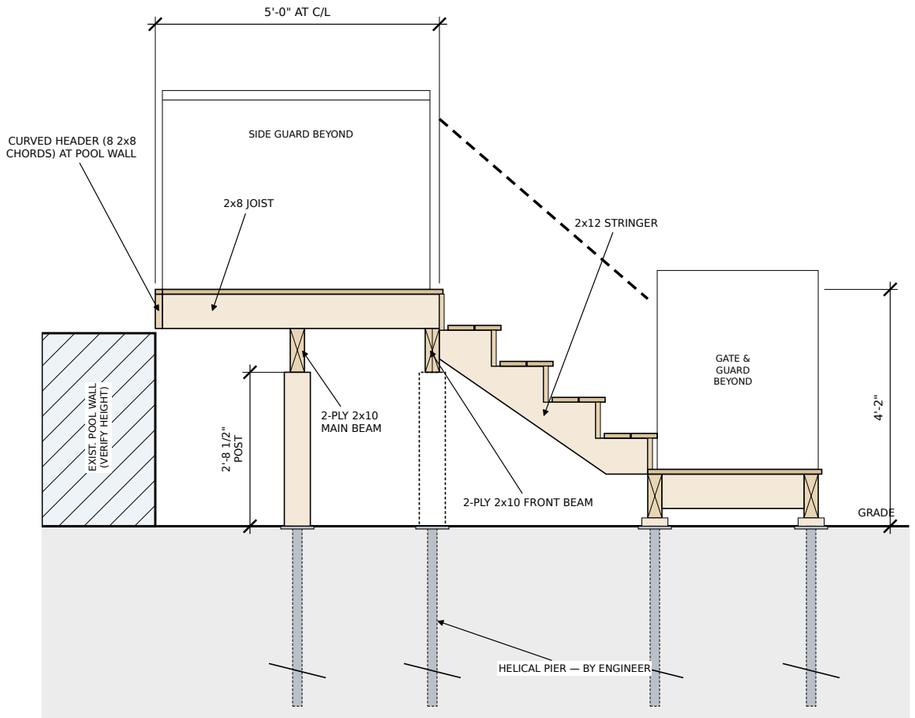

3 SECTION A — THROUGH THE DECK AT THE CENTRELINE

SCALE: 3/8" = 1'-0"

ELEVATION & SECTION NOTES

1. Heights are the model's: lower walking surface 1'-0" and total stair rise 3'-2", giving an upper walking surface of 4'-2".
2. Deck board thickness 1" is what the model's stack leaves: walking surface 4'-2" less post 2'-8 1/2", beam 9 1/4" and joist 7 1/4". Confirm against the selected board.
3. Guard height 3'-6" is the railing product fact recorded for this takeoff. Confirm against the pool-enclosure requirement.
4. Guard infill is shown diagrammatically; the railing system governs post spacing and infill.
5. Pool wall height is not in the model. The pool is drawn dashed and must be field verified.
6. Helical piers are symbols below grade only; length, helix and capacity by the pier engineer.

PRELIMINARY — NOT FOR CONSTRUCTION

Brayman Construction

Brayman Construction Inc.
411 St. John Street, Merrickville, Ontario K0G 1N0

PROJECT
Harbour Lane Pool Deck
48 Harbour Lane, Merrickville, ON K0G 1N0

DRAWING
ELEVATIONS & BUILDING SECTION

SCALE	DATE	SHEET
AS NOTED	**2026-10-16**	**A-4**
DRAWING REVISION	MODEL REVISION	
D1 SET DD3A726E7C	**R1**	

MATERIAL SCHEDULE (FROM THE CALCULATED TAKEOFF)

GROUP	ITEM	QUANTITY	STATUS
Decking	Upper deck boards, straight courses parallel to the front edge…	116.801 sq ft	Calculated
Decking	Lower deck boards, straight courses parallel to the lower fron…	30.0 sq ft	Calculated
Stairs	Stair tread boards, 4 treads.	8 boards	Field verify
Stairs	Riser boards, 5 risers at 7.60 in.	10 boards	Calculated
Decking	PVC/composite deck boards, 12 ft.	18 EA (12 ft)	Calculated
Decking	PVC/composite deck boards, 16 ft.	1 EA (16 ft)	Calculated
Decking	PVC/composite deck boards, 20 ft.	17 EA (20 ft)	Calculated
Fasteners	Deck board fasteners or hidden clips at each board-to-joist an…	5 PKG	Calculated
Fascia	Matching PVC/composite fascia, 12 ft.	5 EA (12 ft)	Calculated
Fasteners	Fascia fasteners.	1 PKG	Calculated
Railing	Guard and stair-rail runs.	40.683 lin ft of level guard	Calculated
Railing	Black aluminum level rail panel, 6 ft.	10 EA (6 ft)	Engineering
Railing	Black aluminum stair rail panel, 6 ft.	2 EA (6 ft)	Calculated
Railing	Black aluminum rail posts, including corner, stair-transition,…	14 EA	Engineering
Railing	Rail fittings: 4 level corners, 2 stair-top and 2 stair-bottom…	10 EA	Calculated
Railing	Compatible black aluminum pool gate, 42 in clear, outward swin…	1 EA	Engineering
Structure	Brown pressure-treated 2x10 × 10 ft — beam.	6 EA (10 ft)	Calculated

MATERIAL SCHEDULE (CONTINUED)

GROUP	ITEM	QUANTITY	STATUS
Structure	Brown pressure-treated 2x10 × 12 ft — beam.	6 EA (12 ft)	Calculated
Structure	Brown pressure-treated 2x12 × 8 ft — stringer.	10 EA (8 ft)	Field verify
Structure	Brown pressure-treated 2x8 × 12 ft — joist, header, blocking, …	17 EA (12 ft)	Field verify
Structure	Brown pressure-treated 6x6 × 8 ft — post, post, post, post, po…	5 EA (8 ft)	Field verify
Structure	Brown pressure-treated 6x6 × 8 ft posts, ordered uncut.	6 EA (8 ft)	Field verify
Structure	Wing blocking, 4 blocks, field-cut. J1 wing blocking.	1 EA (12 ft)	Field verify
Foundations	Helical piers, one at each of 15 drawn locations. No sonotubes…	15 EA	Engineering
Connectors	Helical-pier post bracket, one per pier unless the pier includ…	15 EA	Engineering
Connectors	Post-to-beam connectors, one per post.	15 EA	Engineering
Connectors	Joist-to-header connectors, one per upper joist.	16 EA	Engineering
Connectors	Stringer connectors, one per stringer.	10 EA	Engineering
Fasteners	Beam stitch bolts, two rows at 16 in between piers.	76 EA	Engineering
Fasteners	Nuts for the stitch bolts.	76 EA	Engineering
Fasteners	Washers for the stitch bolts, two per bolt.	152 EA	Engineering
Fasteners	Structural screws, two at each joist bearing on a beam.	100 EA	Engineering
Skirting	Lower-deck skirting on the two sides and the front, including …	TBD	Product facts

ENGINEERING ITEMS — UNRESOLVED (NOT SHOWN OR IMPLIED ON THESE SHEETS)


1. Helical pier shaft, helix, embedment, installation torque and capacity: by the pier manufacturer's engineer.
2. Post-to-pier bracket, post-to-beam and stringer connections: product and capacity not specified.
3. Structural member adequacy (joist, beam, stringer and post sizes and spans): not engineered on these sheets.
4. Beam stitch bolt diameter and spacing: the count is a pricing allowance, not an engineered schedule.
5. Guard post attachment, blocking and guard load path: by the railing manufacturer and designer.
6. Guard height, gate hardware and pool-enclosure (barrier) requirements: confirm with the authority having jurisdiction.
7. Manufacturer installation rules for the deck boards, fascia, railing and gate govern where they differ.

FIELD VERIFICATION BEFORE CUTTING OR ORDERING

1. Each tread: a 0.62 in strip is narrower than the allowed 1.5 in rip. No board is bought for it; the gap or overhang is adjusted on site.
2. Stringer layout and plumb cuts are set out on site.
3. Header segments are field-cut to the verified pool wall.
4. Post cut lengths assume the recorded bracket height and pier-head elevation. Confirm on site before cutting.
5. 6 posts are ordered uncut and cut on site.
6. Wing block lengths are cut on site.

LEGEND

SCALE: 3/8" = 1'-0" (PLAN SYMBOLS)

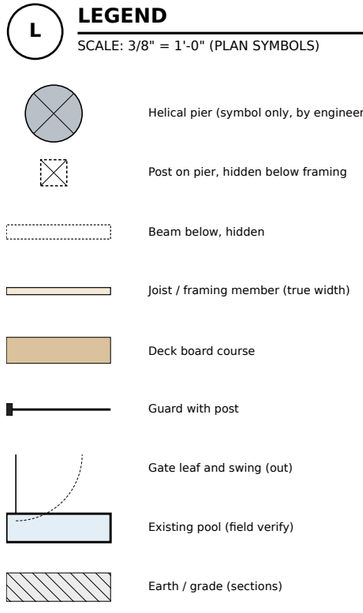

PRODUCT FACTS STILL OPEN

1. Skirting material after the finish change (the earlier issue used pressure-treated 1×6)

DRAWING RECORD

FIELD	VALUE
Construction model revision	R1
Takeoff fingerprint	57d7b1a095e6f5d1
Drawing set	DD3A726E7C
Drawing revision	D1
Status	PRELIMINARY — NOT FOR CONSTRUCTION

PRELIMINARY — NOT FOR CONSTRUCTION

Brayman Construction

Brayman Construction Inc.
411 St. John Street, Merrickville, Ontario K0G 1N0

PROJECT
Harbour Lane Pool Deck
48 Harbour Lane, Merrickville, ON K0G 1N0

DRAWING
SCHEDULES, OPEN ITEMS & NOTES

SCALE	DATE	SHEET
NONE	2026-10-16	G-1
DRAWING REVISION	MODEL REVISION	
D1 SET DD3A726E7C	R1	7 OF 7