

1 Cover, general notes, and approved geometry

Issue J1, 1 Oct 2026. Joel selected 15 piers, 16 joist lines, 10 stringers, a 5.00 in working stringer throat, a 12 in lower-deck walking surface, and street number 12. It is a pricing and permit-review basis. It is not a North Grenville approval and it is not a professional-engineering seal. The 5.00 in throat is not a certification. Issue P1 and the capability-test sheets remain historical.

Client on the documents	Linda Bushel
Project	Freestanding pressure-treated deck and stairs at an above-ground pool
Location	12 D'Arcy's Way, Kemptville, ON K0G 1J0
Framing	Option A: one straight main beam and two wing beams
Pool	21 ft diameter, about 50 in high. Field verify.
Upper deck	18 ft wide. Clear depth 5 ft at the centreline. Three straight edges.
Pool edge	Follows the pool curve. Left open. No attachment to the pool.
Stair	10 ft wide, centred. About 38 in between surfaces. Five risers about 7.6 in.
Lower deck	10 ft wide by 3 ft deep, about 12 in above grade.
Gate	42 in clear, centred, outward, self-closing and self-latching.
Piers	15 piers. 10 in sonotubes, 48 in below finished grade. Bearing not confirmed.

Preliminary layout dimensions — not client measurements

These dimensions place Option A. They are not client measurements. The origin is the pool centre and +Y runs toward the stairs. Front edge Y = 15.5 ft. Sides at X = ±9 ft. Main beam Y = 13 ft, from X = −6 ft to +6 ft. Wing piers at X = ±9 ft, Y = 8.5 ft. Nine upper piers and six lower-deck piers. Issue J1.

LOWER-DECK WALKING SURFACE 12 in

The intended finished walking surface is 12 in above grade. The dressed double 2x10, 2x8, and decking stack is 17.5 in. Post cut length is reconciled to the field before construction. Lower 6x6 posts are ordered uncut. This issue does not certify that cut.

CODE AND PERMIT BASIS

Prepared in accordance with the 2024 Ontario Building Code and applicable Municipality of North Grenville zoning, pool-enclosure and permit requirements. Final construction is subject to municipal review and approval, field verification, and all conditions of the issued permit. This note is not a statement that approval has been granted.

Sheet index

- 1 Cover, general notes, and approved geometry

2 Dimensioned pier and foundation plan

3 Post, beam, wing, joist, blocking, and header

4 Decking, stair, guard, gate, and skirting
- 5 Front and side elevations

6 Stair riser, tread, and stringer

7 Typical pier, post, beam, joist, and connectors

8 Field verification, permit, and supplier notes


Preliminary Construction and Supplier Pricing Basis - Subject to Permit Review and Field Verification

Linda Bushel · 12 D'Arcy's Way, Kemptville, ON K0G 1J0

Issue J1 2026-10-01 Preliminary Not a permit approval Not an engineering seal

Field verify: pool size, grades, setbacks, pier bearing, stair rise and run, guard height.

2 Dimensioned pier and foundation plan

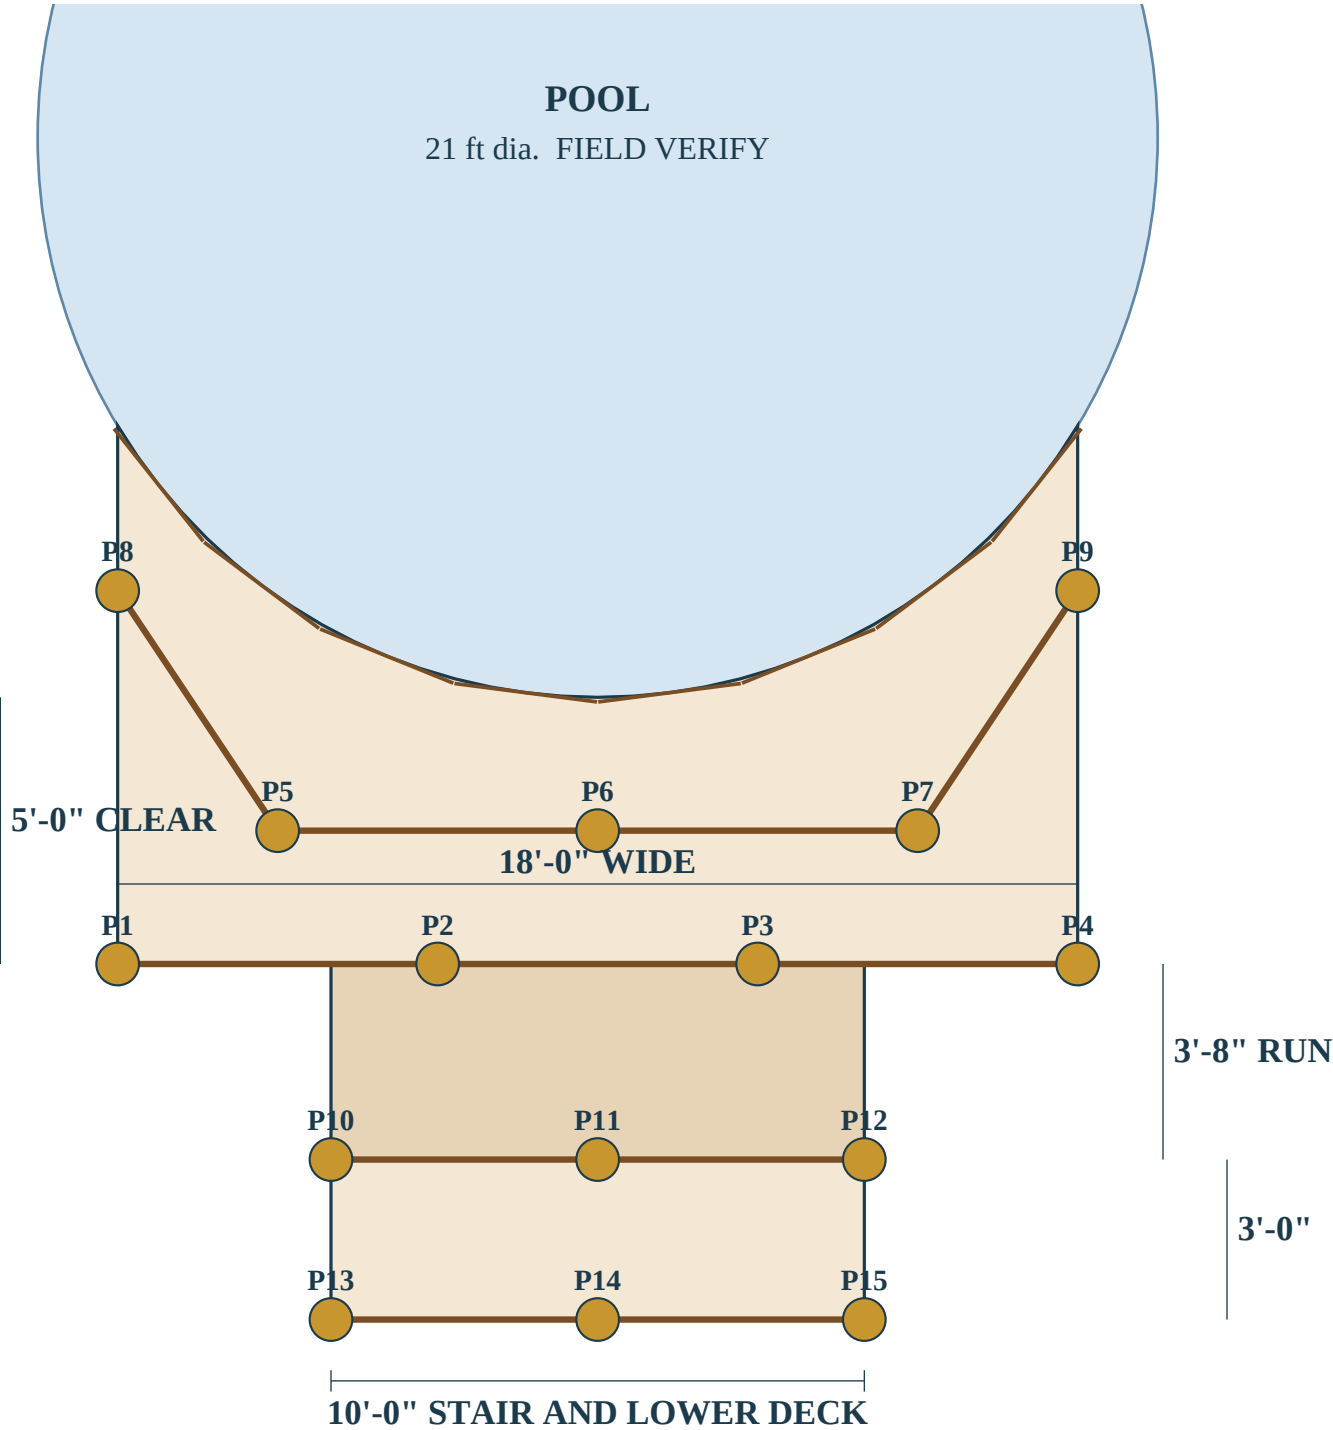

Notes

P1–P9 are the nine upper-deck piers. P10–P15 are the six lower-deck piers. Total 15. This is the CT-1 pier layout.

Each pier is a 10 in diameter sonotube, 48 in below finished grade. Above-grade reveal is not recorded. Do not add a reveal that was not measured.

P6 clearance to the pool wall at the centreline is 2'-6". P8 and P9 clearance to the pool centre is 1'-10 9/16" outside the wall.

No pier is inside the pool. Bearing, frost depth, and municipal pier rules are field and permit items. This sheet does not certify them.

Front beam piers are 6 ft apart. Main-beam piers are 6 ft apart. Each lower rim is two 5 ft bays. Spans are not checked against a span table on this issue.

Coordinate origin: pool centre. Front edge Y = 15'-6". Main beam Y = 13'-0". Wing piers Y = 8'-6".

Stair run used here is 4 treads × 11 in = 3'-8". Lower deck then runs from Y = 19'-2" to Y = 22'-2".

Pier schedule

P1	X -9'-0"	Y 15'-6"	P9	X 9'-0"	Y 8'-6"
P2	X -3'-0"	Y 15'-6"	P10	X -5'-0"	Y 19'-2"
P3	X 3'-0"	Y 15'-6"	P11	X 0'-0"	Y 19'-2"
P4	X 9'-0"	Y 15'-6"	P12	X 5'-0"	Y 19'-2"
P5	X -6'-0"	Y 13'-0"	P13	X -5'-0"	Y 22'-2"
P6	X 0'-0"	Y 13'-0"	P14	X 0'-0"	Y 22'-2"
P7	X 6'-0"	Y 13'-0"	P15	X 5'-0"	Y 22'-2"
P8	X -9'-0"	Y 8'-6"			

Scale: 20 pt = 1 ft. Pool is at the top. Read the figured dimensions.

Preliminary Construction and Supplier Pricing Basis - Subject to Permit Review and Field Verification

Linda Bushel · 12 D'Arcy's Way, Kemptville, ON K0G 1J0


Issue J1 2026-10-01 Preliminary Not a permit approval Not an engineering seal

Field verify: pool size, grades, setbacks, pier bearing, stair rise and run, guard height.

Option A

Wordmark only — no Brayman logo file is in this case

3 Post, beam, wing, joist, blocking, and header plan

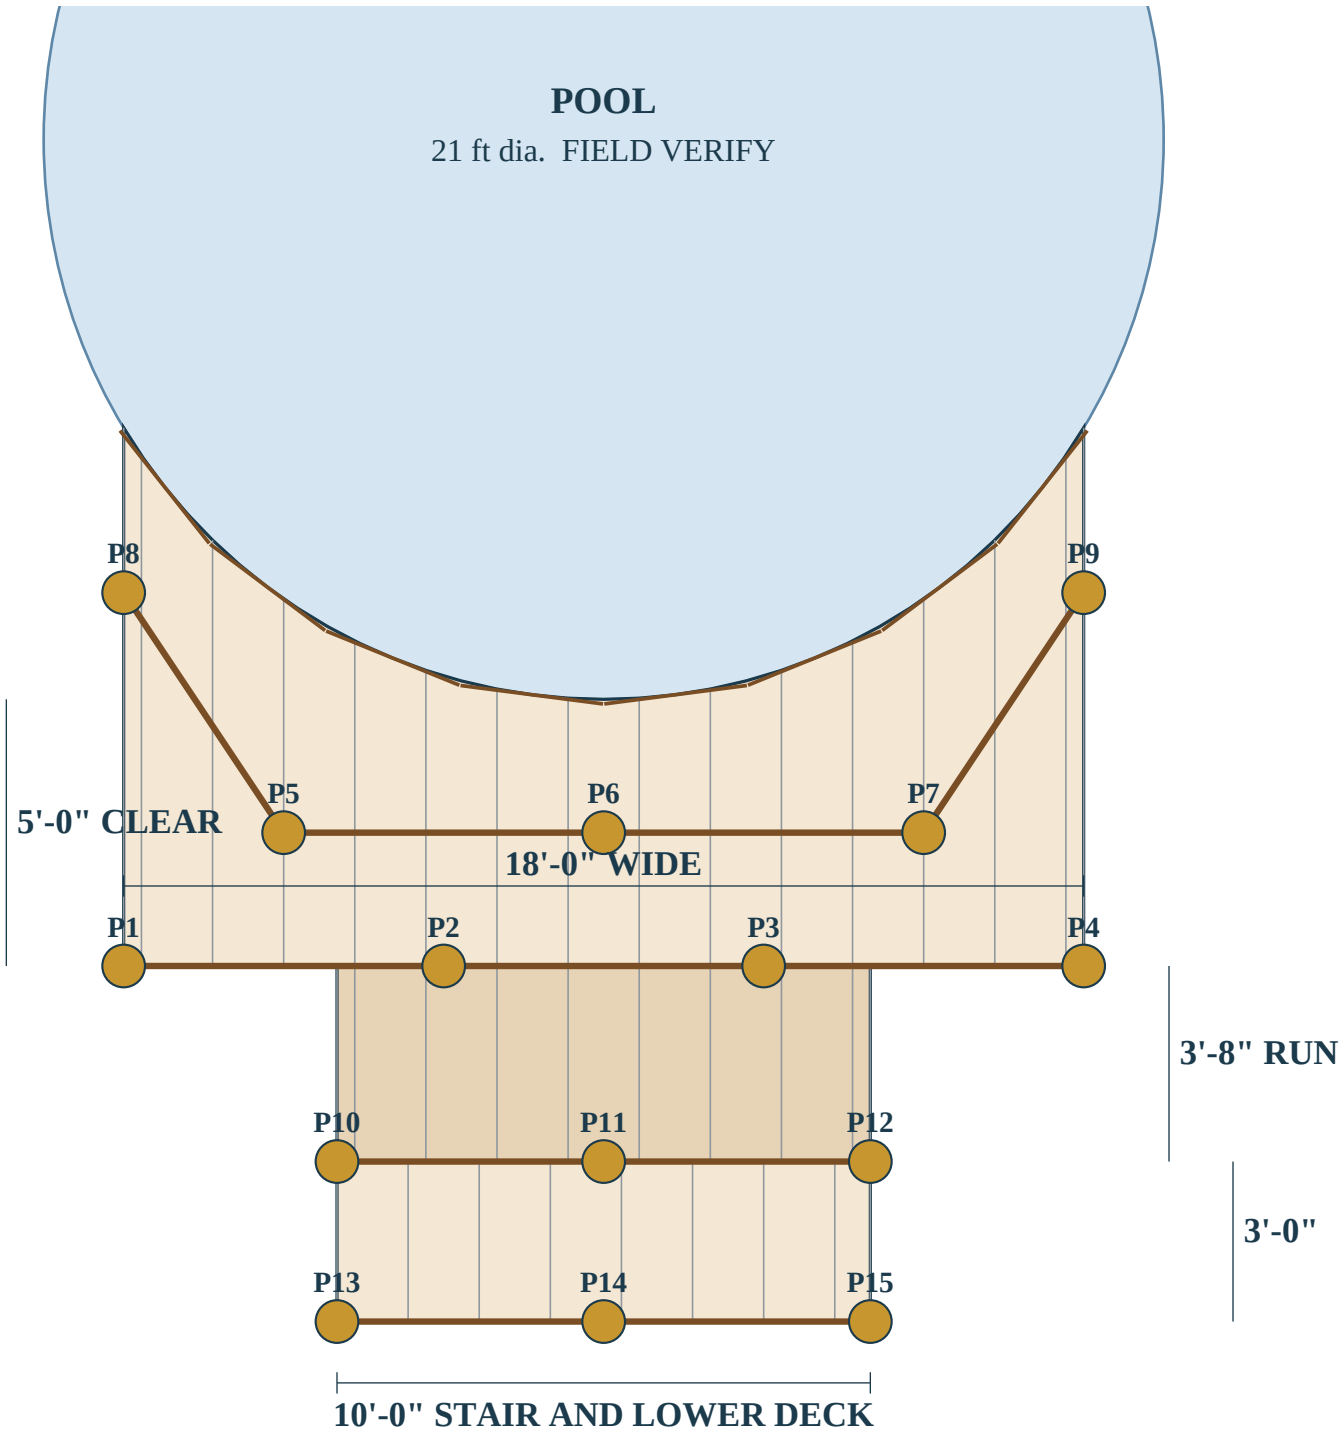

Scale: 20 pt = 1 ft. Pool is at the top. Read the figured dimensions.

Notes

Grey lines are 2×8 joists. Brown lines are double 2×10 beams and the segmented 2×8 header.

Joists run perpendicular to the 18 ft front edge, at 16 in on centre maximum. The layout is symmetric about the centreline: joists at the rims and at ±8, 24, 40, 56, 72, 88, and 104 in. The closing space at each rim is 4 in. Sixteen joists.

The main beam is double 2×10, 12 ft long, Y = 13 ft, X = −6 ft to +6 ft. Wings are double 2×10 from the beam ends at P5 and P7 to the wing ends at P8 and P9. Length of each wing is 5.41 ft.

The front beam is double 2×10 along the 18 ft front edge, in three 6 ft pieces per ply, spliced over P2 and P3.

Curved header: 8 straight 2×8 segments, each 2.695 ft. Midpoint touches the pool arc. Ends stand off the pool by the sagitta, 1.04 in. No segment enters the pool. Field-cut to the real pool.

Joist lengths are measured to the recorded pool arc. Header joints stand off that arc by up to 1.04 in.

Blocking shown in the take-off: 22 pieces of 14.5 in clear in the 16 in bays at the front beam and the main beam, two short closers in the 4 in bays, and four wing blocks.

Lower-deck joists are 2×8 at 16 in on centre across the 10 ft width, spanning the 3 ft depth. Walking surface 12 in. Post cut length is a field item.

Preliminary Construction and Supplier Pricing Basis - Subject to Permit Review and Field Verification

Linda Bushel · 12 D'Arcy's Way, Kemptville, ON K0G 1J0


Issue J1 2026-10-01 Preliminary Not a permit approval Not an engineering seal

Field verify: pool size, grades, setbacks, pier bearing, stair rise and run, guard height.

Option A

Wordmark only — no Brayman logo file is in this case

4 Decking, stair, guard, gate, and skirting plan

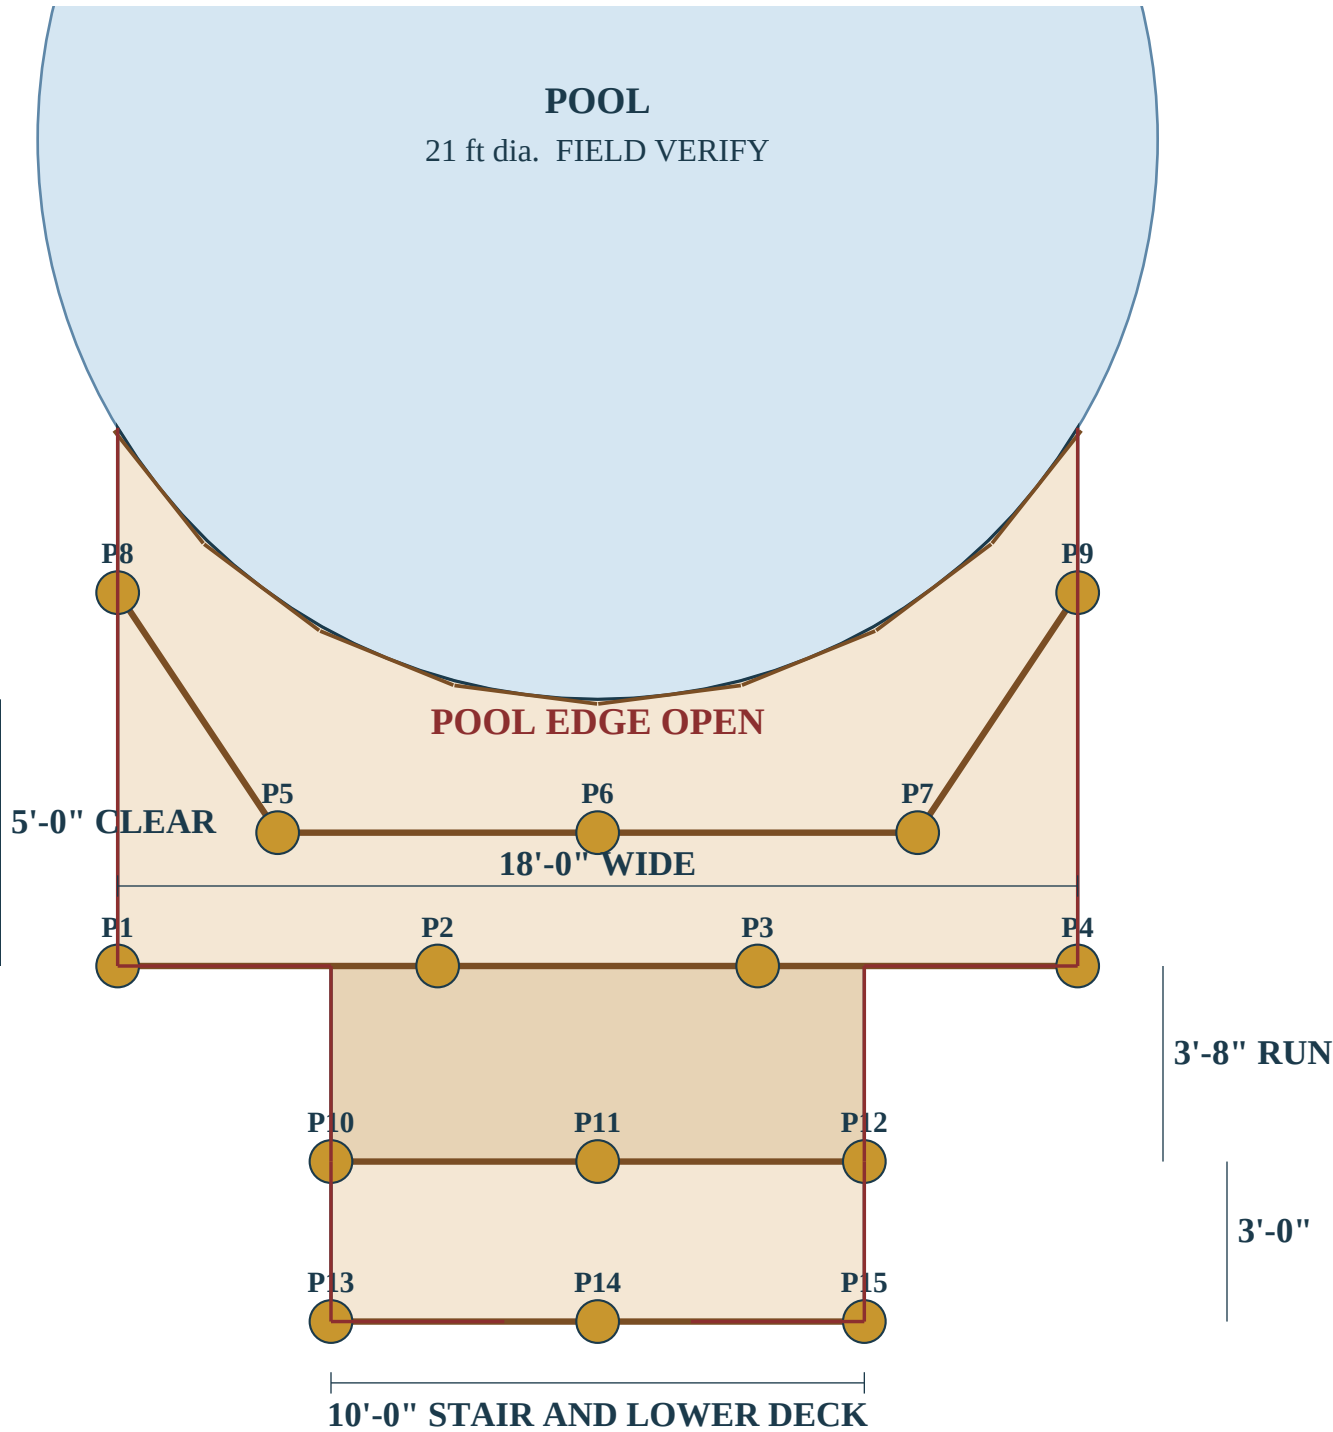

Notes

- Deck boards run parallel to the 18 ft front edge. Coverage used for the count is the dressed 5.5 in width, with no extra gap. A drainage gap was not specified. If a gap is required, the count changes.
- Upper full-width band is the 5 ft from the pool tangent to the front edge: 10 rows at 5.5 in and one row ripped to 5.0 in. Eleven boards, 18 ft long.
- Beside the curve, eleven rows each side follow the recorded arc. Piece lengths are in the take-off. A 0.60 in remainder at the side corners is a field fit, not an extra board.
- Red lines are guard runs. The curved pool edge is open. There is no centre stair handrail.
- Straight runs are counted as Veranda 37 in × 6 ft kits, one module per started 6 ft on each straight segment. Kits are not assumed to turn a corner or to be cut in half.
- Stair guards and the gate are custom matches to Home Depot HDDR2022005 / SKU 1001900458. That is not confirmed as a BMR stock item.
- Skirt is the lower deck only: vertical 1×6, tight, on the two sides and the front, including under the gate. Section 4 of the brief assigns that skirt. Upper-deck skirting is not quantified.
- Gate opening is 42 in clear, centred on the 10 ft lower front. Guard returns each side are 3.25 ft.

Scale: 20 pt = 1 ft. Pool is at the top. Read the figured dimensions.

Preliminary Construction and Supplier Pricing Basis - Subject to Permit Review and Field Verification

Linda Bushel · 12 D'Arcy's Way, Kemptville, ON K0G 1J0

Issue J1 2026-10-01 Preliminary Not a permit approval Not an engineering seal

Field verify: pool size, grades, setbacks, pier bearing, stair rise and run, guard height.


Option A

Wordmark only — no Brayman logo file is in this case


5 Front and side elevations

Horizontal scale 20 pt = 1 ft. Vertical scale 56 pt = 1 ft. Lower deck 12 in. Rise 38 in. Upper surface 50 in. Pool about 50 in. Guards are the 37 in kit.

Side elevation — looking along the 18 ft edge, stair to the right

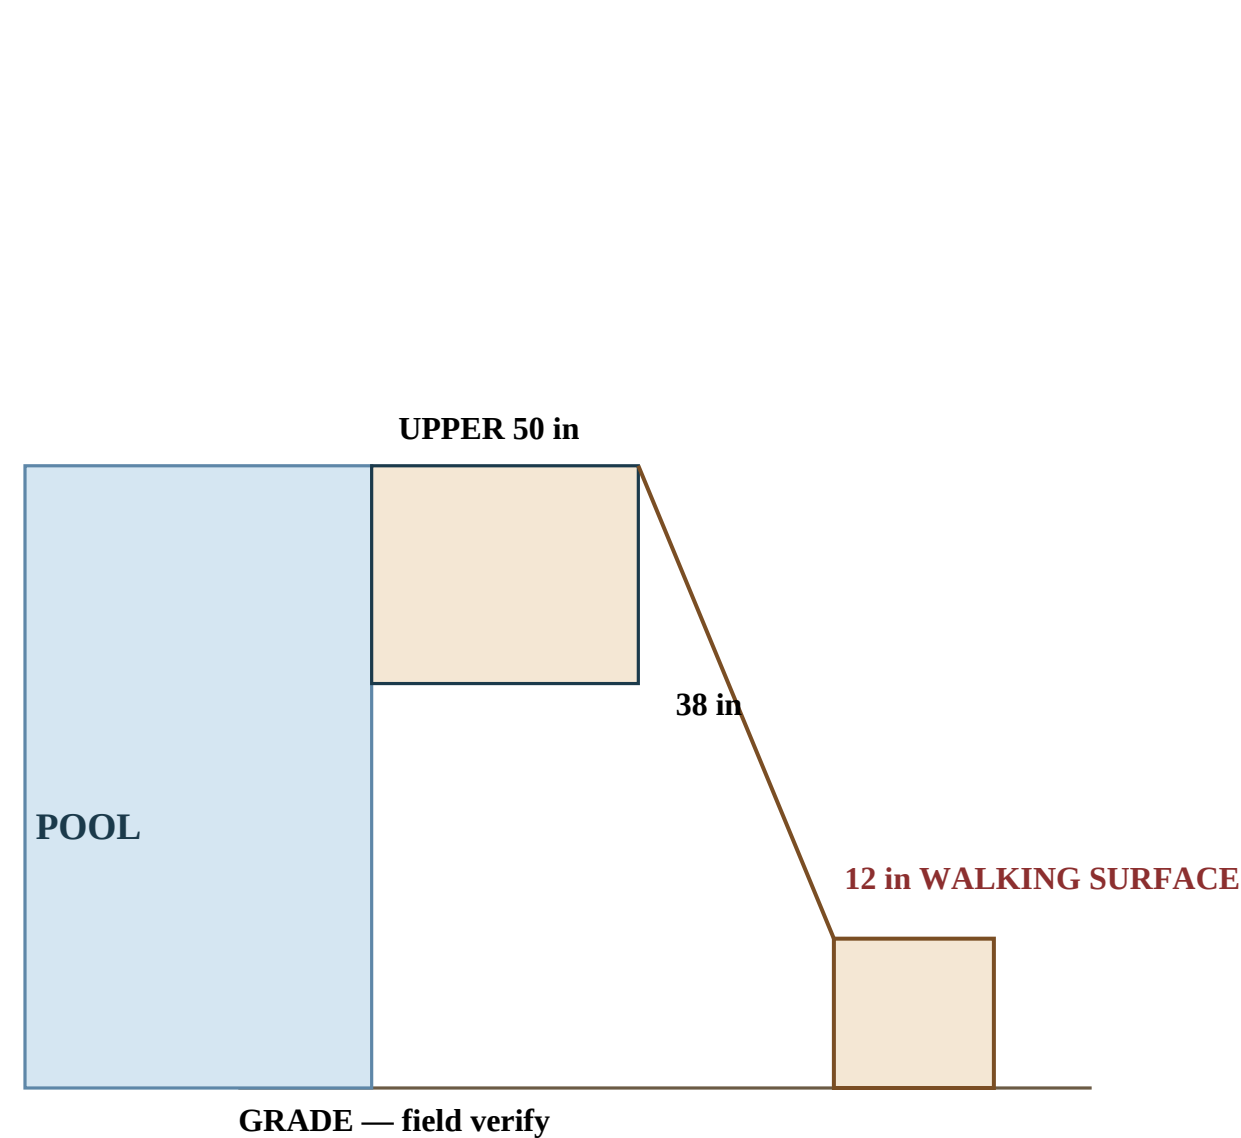

Front elevation — standing at the lower-deck entrance

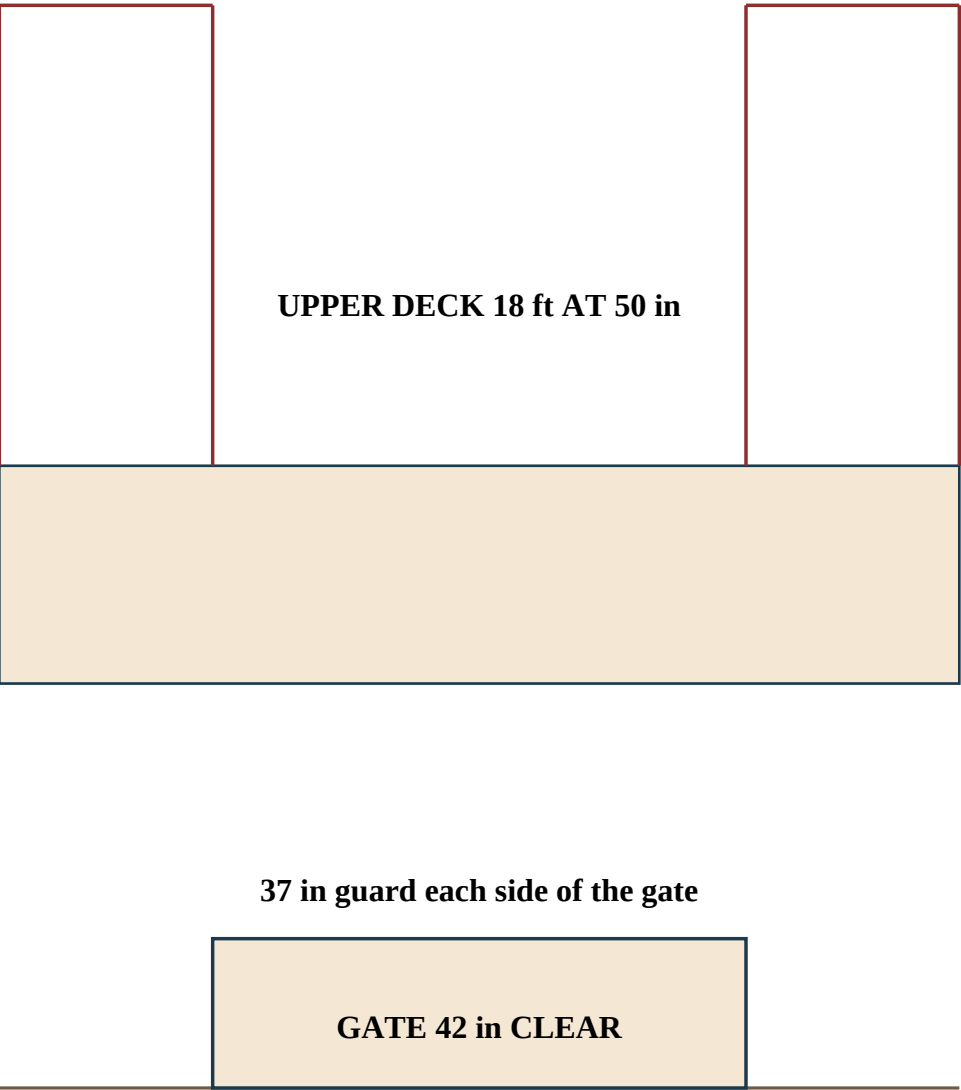

Upper thickness is the 17.5 in stack. Lower deck is the 12 in walking-surface basis. Post cut is a field item.

37 in kit height. The 1.2 m enclosure rule stays open.

Preliminary Construction and Supplier Pricing Basis - Subject to Permit Review and Field Verification

Linda Bushel · 12 D'Arcy's Way, Kemptville, ON K0G 1J0

Issue J1 2026-10-01 Preliminary Not a permit approval Not an engineering seal


Field verify: pool size, grades, setbacks, pier bearing, stair rise and run, guard height.

Option A

Wordmark only — no Brayman logo file is in this case

6 Stair riser, tread, and stringer

Five risers of about 7.6 in and treads of about 11 in, over about 38 in. This sheet uses four treads because the upper deck is the top landing. Field-adjust the rise and run. This sheet does not certify stair compliance.

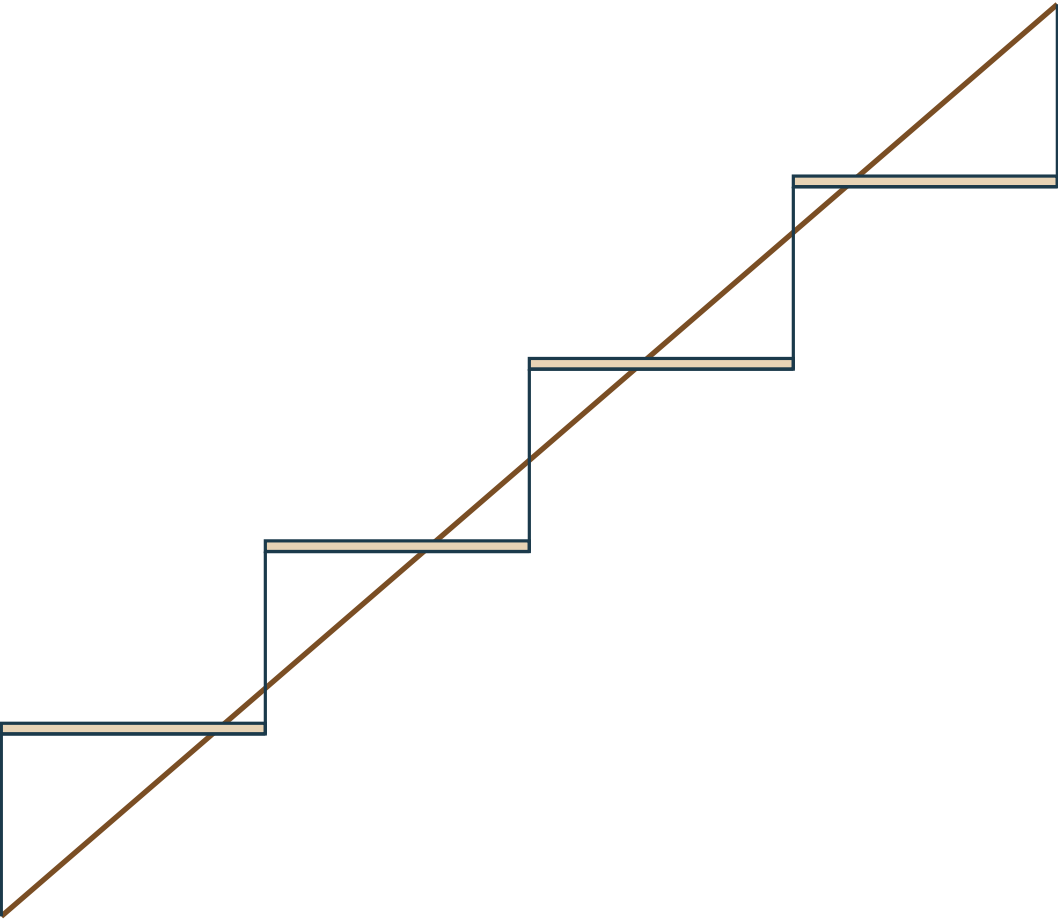

Total run 3'-8" Total rise 3'-2" Stringer cut basis 58.1 in
Each tread is two 5/4 × 6 boards, 10 ft long. No centre handrail.

Stringer count

Ten 2×12 stringers across the 10 ft width, at 16 in on centre maximum, with a 4 in closing space at each edge. Slope length 58.1 in. Purchase 8 ft stock. Working throat basis 5.00 in, calculated 4.997 in. This is not an engineering certification. The plumb cuts are not detailed on this issue.

FIELD VERIFY RISE AND RUN

Pool height, lower-deck height, and finished grade move the 38 in difference. Keep five equal risers only after the two surfaces are measured.


Preliminary Construction and Supplier Pricing Basis - Subject to Permit Review and Field Verification

Linda Bushel · 12 D'Arcy's Way, Kemptville, ON K0G 1J0

Issue J1 2026-10-01 Preliminary Not a permit approval Not an engineering seal

Field verify: pool size, grades, setbacks, pier bearing, stair rise and run, guard height.

7 Typical pier, saddle, post, beam, joist, and connectors

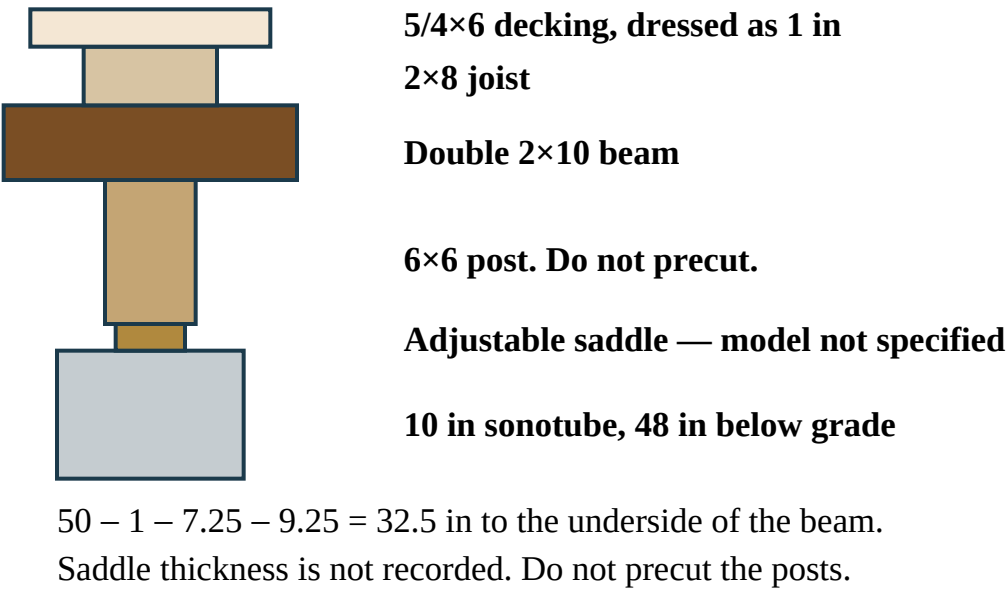

LOWER DECK 12 in

The intended walking surface is 12 in above grade. The dressed stack is 17.5 in. Post cut length is a field reconciliation before construction. Lower 6×6 posts are ordered uncut.

Connector count

These counts follow the drawn members. They are not a manufacturer’s specified system.

15 adjustable post saddles, one per pier.

15 post-to-beam connectors, one per post. Product not specified.

16 angled connectors where upper joists meet the segmented header.

10 stringer connectors at the upper rim.

Joists bear on top of the straight beams: two structural screws at each bearing.

Deck screws: two at each board crossing of a joist or stringer. Count is in the take-off.

Built-up beam stitch, pricing allowance only: two rows at 16 in on centre between posts.

That stitch is 76 bolts with nuts and washers. Diameter is not specified. It is not an engineered schedule.

Guard-post blocking is required by the brief and is not quantified. Pattern not issued.

Exterior-rated, corrosion-resistant, compatible with pressure-treated lumber.

4×4 guard posts are listed separately from the rail kits.

Confirm the kit does not already include posts.

8 Field verification, permit, and supplier notes

1. Pool diameter and height. The 21 ft and 50 in figures are approximate.
2. Finished grades, installed pool elevation, setbacks, and property limits.
3. Pier bearing and the municipal rule for the 48 in depth. Above-grade pier reveal is not recorded.
4. Structural separation from the pool. No attachment is specified. No clearance dimension was recorded. Header segments touch the arc at mid-span and stand off about 1.04 in at the joints.
5. Stair rise and run after the two deck surfaces are measured.
6. Guard height. The specified product is 37 in. A separate preservation note said about 42 in. The brief also estimates about 49 in from grade to the top of the lower rail and leaves the 1.2 m pool-enclosure rule for municipal confirmation. Those figures are not averaged.
7. Lower-deck walking surface is 12 in. Post cut length is reconciled in the field. The dressed stack is 17.5 in. Do not precut the lower posts.
8. Beam spans against the span table the municipality accepts. Not checked here.
9. Veranda panel rules: whether a 6 ft kit can be cut, and whether posts are included.
10. Delivery address is 12 D'Arcy's Way, Kemptville, ON K0G 1J0. The request has not been sent.

WHAT THIS ISSUE DOES NOT DO
No permit approval. No engineering seal. No structural certification of the 5.00 in throat. No Brayman cost, customer price, or gross margin. The supplier package is a request for quotation. It has not been sent. Darcy’s quotation will govern.

Take-off and the Darcy request are in this same case folder. Contractor price, availability, substitution, and delivery timing are blank.

Preliminary Construction and Supplier Pricing Basis - Subject to Permit Review and Field Verification

Linda Bushel · 12 D'Arcy's Way, Kemptville, ON K0G 1J0

Issue J1 2026-10-01 Preliminary Not a permit approval Not an engineering seal

Field verify: pool size, grades, setbacks, pier bearing, stair rise and run, guard height.